
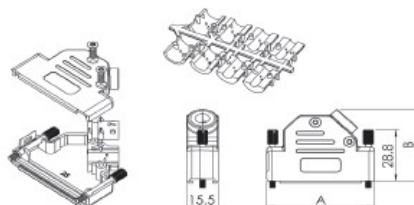


Cableados y Conexiones

D-Sub Backshells DVPK-Series

TECHNICAL SPECIFICATIONS

Material: Polycarbonat (UL94 V-0)
 Temp. range: -55°C - 105°C
 Cable strain relief: Steel fibre reinforced PC (UL94 V-0)
 Cable diameter: 3.0 - 13.0 mm
 Locking screws: Long solid jackscrews with groove to indicate thread version
 Cable outlet: Angled

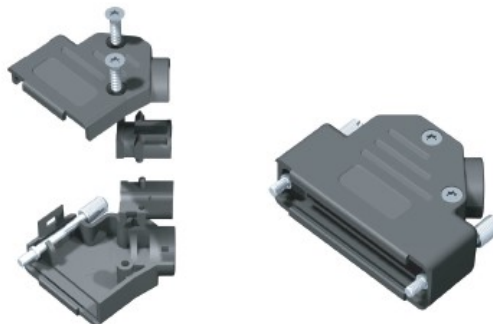

TYPE	A	B
DVPK9	31	36.2
DVPK15	39.3	40.2
DVPK25	53	40.2
DVPK37	69.5	40.2

PART NUMBERING SYSTEM

DVPK25 - M2.6 - RED - K

Series: _____
 DVPK
 Size: _____
 9, 15, 25 or 37
 Thread (jackscrew): _____
 Omit = UNC 4-40
 M2.5
 M2.6
 M3.0
 Colour: _____
 Omit = Black
 Other colours available: beige, blue, brown, green, grey, ivory, red, white and yellow
 Packaging: _____
 K = Kit package
 BULK = Bulk / 100 pcs

FEATURES


- Available in sizes 9, 15, 25 and 37
- Light weight and cost effective
- Compact and attractive design
- Suitable for high-integrity data links
- No special assembly tools required
- Moulded logotype available upon request
- Long jackscrews with UNC 4-40 thread as standard, M2.5, M2.6 or M3.0 as option
- For custom designed solutions, please consult factory




Cableados y Conexiones

Assembly instruction DVPK Series


Use two halves of strain relief
different sizes can be mixed.

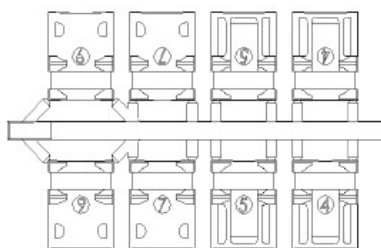

Attach the strain relief around the cable.



Mount connector and cable
into the backshell

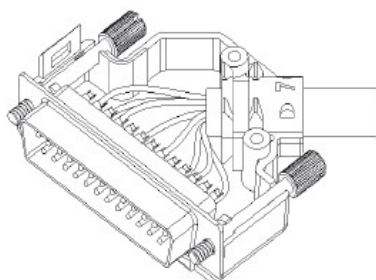

Assemble the other half
screwing force: 100-120 Ncm.

