


Cables Series DMX 30 - DMX Cable 2 x 0.23 mm²

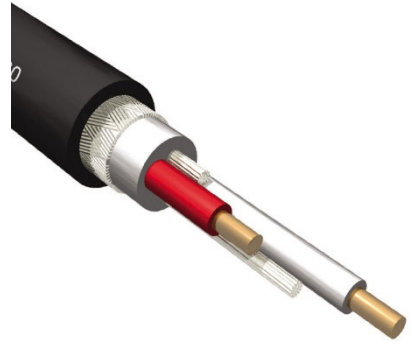

DMX cable Ø 6 mm

MECHANICAL DATA:

- **Temperature range fixed installation:**
 - Fixed installation: -40° C to +80° C
 - Flexible installation: -25° C to +70° C
- **Bending radius :**
 - Fixed installation: 8 x outer diameter
 - Flexible installation: 10 x outer diameter

TECHNICAL DATA:

-
- **Type of cable:** DMX cable
- **Inner conductor:** 2 pcs. BC 20 x 0.12 mm
- **Inner conductor section:** 0,23 mm²
- **Isolation:** FPE 1,6 mm
- **Shielding:** BC 16 x 4 x 0.12 mm, braiding
- **Shielding %:** 100%
- **Cord:** 2 x cords
- **Outer jacket:** Flexible PVC
- **Outer jacket color:** black
- **Outer jacket diameter:** Ø 6 mm
- **Printing color:** white
- **Printing text:** Procab DMX 30
- **Type of packing:** Plastic reel for 100 meter
- **Impedance:** 110 Ohm

ATTENUATION DATA:

- **@ 5 Mhz:**
 - 2,683 dB/100 ft.
 - 8,8 dB/100 m
- **@ 10 Mhz:**
 - 4,26 dB/100 ft.
 - 13,97 dB/100 m
- **@ 25 Mhz:**
 - 5,24 dB/100 ft.
 - 17,19 dB/100 m
- **@ 50 Mhz:**
 - 9,60 dB/100 ft.
 - 41,499 dB/100 m
- **@ 75 Mhz:**
 - 12,15 dB/100 ft.
 - 39,88 dB/100 m
- **@ 100 Mhz:**
 - 20,17 dB/100 ft.
 - 50,49 dB/100 m