


CABLE SFTP CAT7 RJ45 M-M XX MTS GRIS AWG26/7 (600Mhz) REF. C730-XX-COLOR

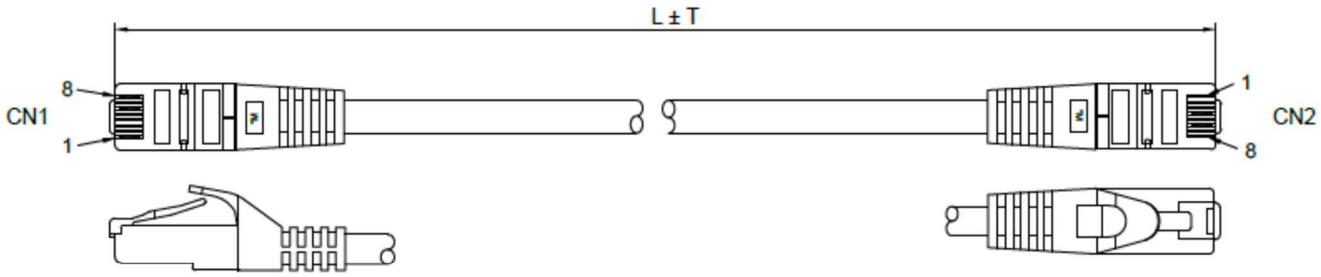

PIN OUT

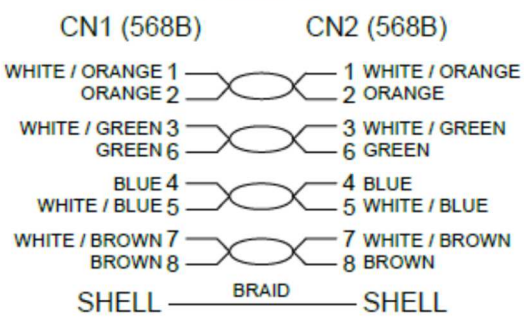

L [m]
0.25
0.50
1.00
1.50
2.00
3.00
5.00
7.50
10.00
15.00
20.00
25.00
30.00

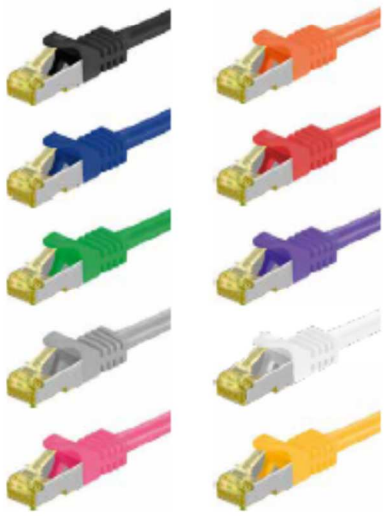

CAT 7-xxxx S/FTP PIMF RJ45 LSZH x.xx m

RJ45 patch cord CAT 6A S/FTP (PiMF), with CAT 7 raw cable

- *Cat 7 raw cable up to 600 MHz*
- *with 50µ gold plated PINs*
- *pairs screening:*
  PIMF (pairs in metal foil) + outer shield: braiding
- *with length indication on the slimline strain relief*
- *with latch protection*
- *suitable for Power over Ethernet (PoE/PoE+)*
- *Operating temperature: -20 °C up to 65 °C*

Spezifikation / *Specification*	CAT 6
Kabeltyp / *Cable type*	CAT 7 Rohkabel / *round cable*
Innenleiter, Material / *Inner conductor material*	CU (Kupfer) / *CU (copper)*
Innenleiter, Aderdurchmesser / *Inner conductor, core diameter*	(7/0.15 ± 0.005 mm)
AWG	26/7 (stranded)
Schirmungsklasse / *Shielding class*	S/FTP (PiMF)
Anzahl Schirmungen / *Number of shieldings*	2 x
Typ 1, Schirmung / *Type 1, shielding*	Folie (Alu) PiMF/ *foil (alu) PiMF*
Typ 2, Schirmung / *Type 2, shielding*	Geflecht (Alu) Gesamtschirm / *braid (alu) overall shield*
Durchmesser Kabelmantel (ca.) / *Cable sheath diameter (approx.)*	Ø 6.2 ± 0.2 mm, LSZH
Knickschutz / *Kink protection*	beidseitig / *both sides*
LSZH-konform / *LSZH compliant*	ja / *yes*
Anschluss, Typ / *Connection, type*	RJ45-Stecker (8P8C) / *RJ45 male (8P8C)*
Anschluss, Schirmung / *Connection, shielding*	ja / *yes*
Anschluss 2, Typ / *Connection 2, type*	RJ45-Stecker (8P8C) / *RJ45 male (8P8C)*
Rastnasenschutz / *Latch protection*	beidseitig / *both sides*