
T-50-UW-NM



Termination Load, 0–6000 MHz

Product Classification

Regional Availability	Asia | Australia/New Zealand | EMEA | Latin America | North America
Product Type	Termination Load

General Specifications

Device Type	Termination Load
Application	Indoor/Outdoor
Color	Black
Inner Contact Plating	Silver
Interface	N Male
Outer Contact Plating	Trimetal

Dimensions

Height	50 mm | 1.969 in
Width	50 mm | 1.969 in
Length	125 mm | 4.921 in


Electrical Specifications

Average Power, maximum	50 W
Impedance	50 ohm
Operating Frequency Band	0 – 6000 MHz
VSWR	1.2

Derating Curve

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: August 30, 2020

T-50-UW-NM

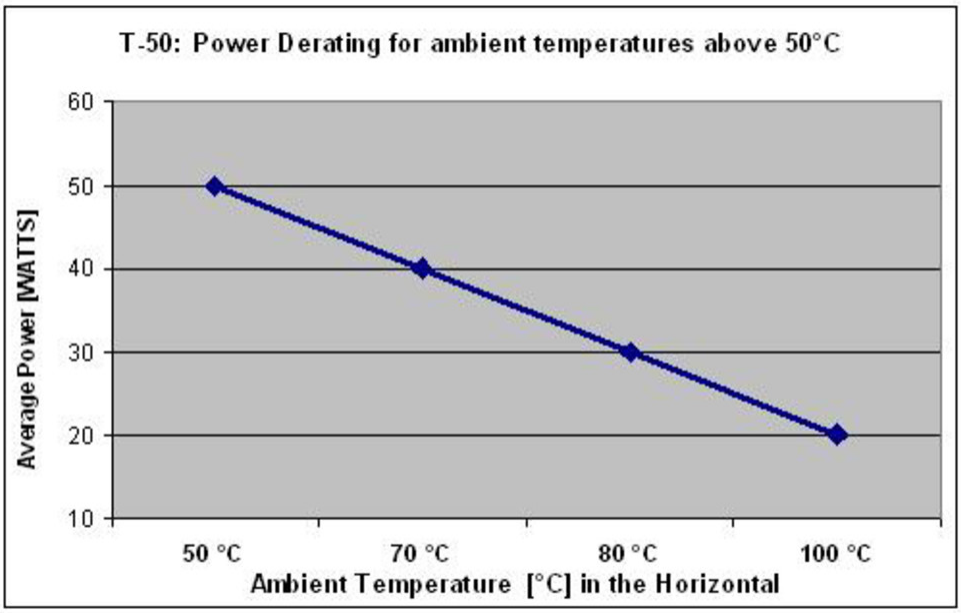

Environmental Specifications

Operating Temperature	-25 °C to +50 °C (-13 °F to +122 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP65

Packaging and Weights

Height, packed	58 mm | 2.283 in
Width, packed	78 mm | 3.071 in
Length, packed	158 mm | 6.22 in
Weight, gross	0.42 kg | 0.926 lb
Weight, net	0.37 kg | 0.816 lb

Regulatory Compliance/Certifications

Agency	**Classification**
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

ISO 9001:2015

©2020 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See www.commscope.com for the most current information. Revised: August 30, 2020