

Notes:

1. Material and Finish:
 - Coupler Ring: Polyester (Black); UL94 V-0
 - Plug Housing: Polyester (Black); UL94 V-0
 - Cable Gland: PA (Black), UL94 V-0
 - Cable Gland Rubber Ring: NBR, Color: Black
 - Cable Fitting: PA (Black), UL94 V-0
 - Interfacial Seal: Silicone, Color: White

(f) Duplex LC Connector

- Housing: PEI, UL94 V-0,

(e) (b) Color: **SM Blue/MM Beige/APC SM Green**





- Inner Sub Assembly: Zirconia, Metal and PTFE
- Crimp Barrel: Brass, Nickel Plated
- Ferrule: Brass, Nickel Plated
- Dust Cap: PC, Color: White

(c) Duplex LC Clip: PC, Color: Black

- Operating Temperature: -40°C to +85°C

2. IP67 rated when covered or fully mated with the appropriate mating connector

(d) 3. Accept 4.5mm to 8.0mm outside diameter fiber optic cable

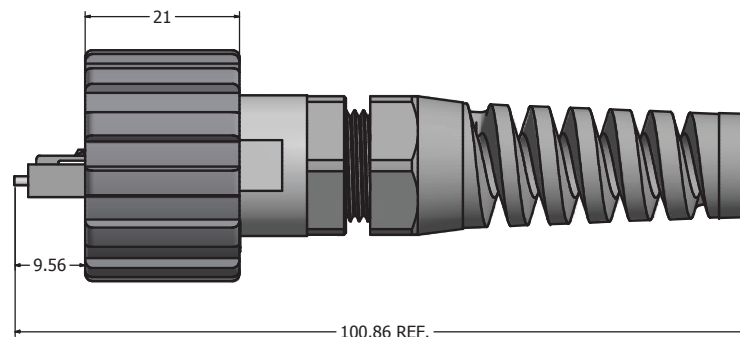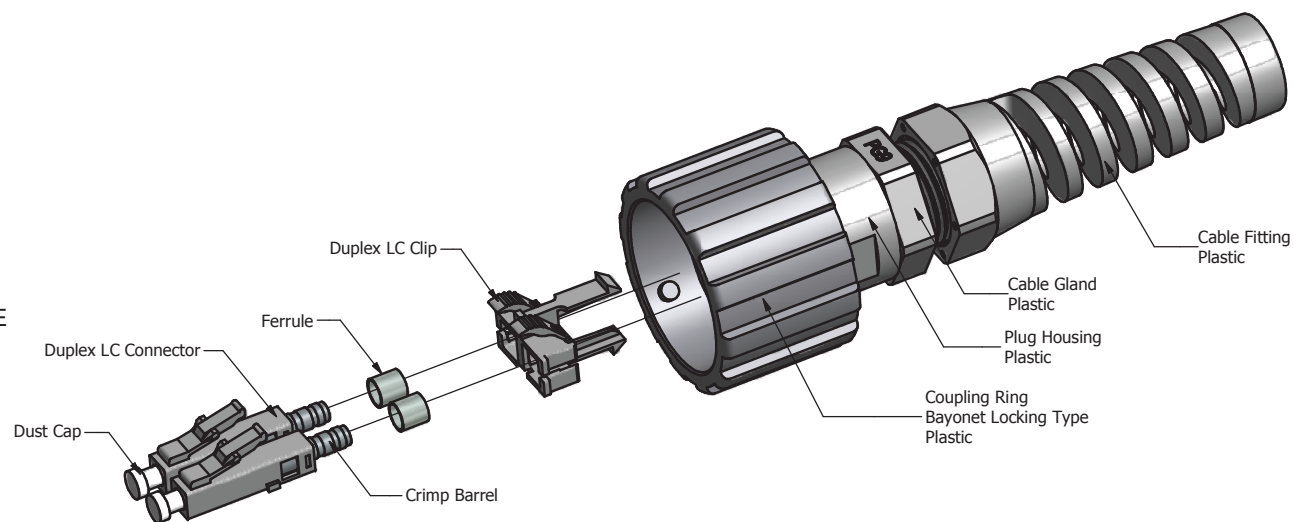

Description	Part Number
Single Mode (SM)	17-300030
Multi Mode (MM)	17-300040
(e) APC Single Mode (APC SM)	17-300110

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY. CONE CANNOT BE HELD RESPONSIBLE FOR THE OWNERSHIP AND COPYRIGHT OF CONE'S CORPORATION	DO NOT ALTER CAD DRAWING BY HAND	Customer:			Tolerance Unless otherwise specified				Scale: 1.5:1		Dim. in mm	
		Name		Title	Approval Date	9	0 PLC ±0.58		Material: See Notes			
							1 PLC ±0.38					
		g 1 x g		Sep/25/2013	Vincent Ke	2008	Date	Name	Title: IP67 Industrial Duplex LC Plug Kit Plastic Version			
		f 1 x f		Jul/12/2011	Vincent Ke	Draw.	Jun. 06	Vincent Ke				
		e 2 x e		Nov/22/2010	Vincent ke	Appd.	Jun. 06	J. Chaudry				
		d 1 x d		Nov/03/2010	Vincent Ke	Norm						
		c 1 x c		Jul/19/2010	Vincent Ke	D-old						
		b 1 x b		May/28/2009	Vincent Ke				Drawing No.: 17K1A003		DIM A3	
		a original							Part No.: SEE P/N ABOVE		Sheets 1/	
		Rev.		Changes	Date							