



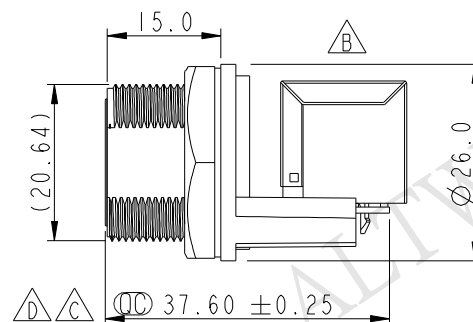
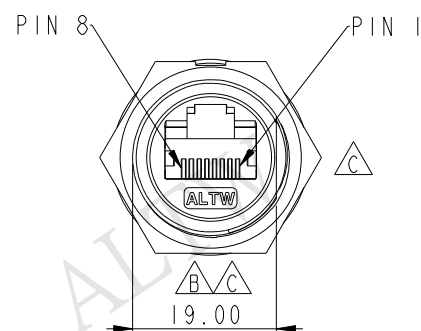
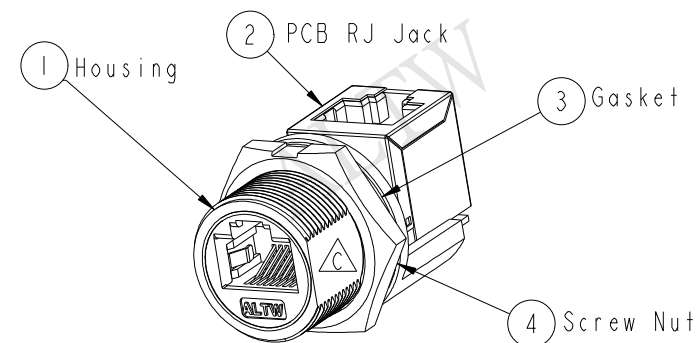


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1440111	2014-04-10	Tom_gu	Change H Cut To D Cut
D		2014-8-29	Feng_Li	Change Size

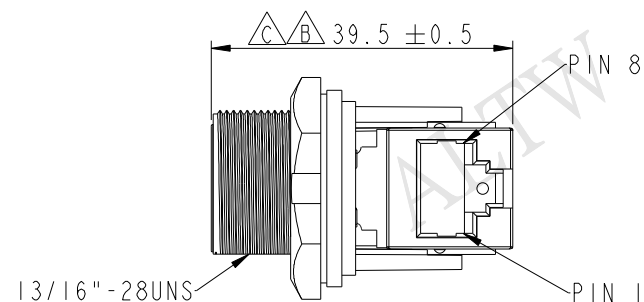

Recommended
Panel Cut-out
Rear View



Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate : IP67 Unmated
- * Housing : Nylon+GF,UL 94V-0,BLACK
- * Screw Nut : Nylon+GF,BLACK
- * $\triangle$ Gasket : Silicone,UL 94V-0,Gray.
- * PCB: FR-4
- * Jack : PBT Polyester UL 94V-0
- * $\triangle$ Use without Waterproof cap or Dust cap
For Panel Thickness Max: 4.2mm
- * Use with Waterproof cap or Dust cap
For Panel Thickness Max: 3.0mm
- * $\triangle$ Screw torsion value range: 8~12kgf-cm

UNIT:mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
		RJ45,C SIZE,WATERPROOF		安費諾亮泰企業股份有限公司		RCP-5SPFFV-SCU7001	Feng_Li	2014-08-29
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE
.X ±0.25		1:1	A4	1	1	RCP-5SPFFV-SCU7001	Tom	2014-08-29
.XX ±0.1		REV.	WC-REV.	C.2		CUSTOMER	APPROVED BY	DATE
.XXX ±0.05		D		$\varnothing$ Inspection item		ALTW	Victor	2014-08-29
ANGLES ±1°								