

CONECTOR MACHO EZ-RJ45 CAT5 y CAT5E y CAT6 FTP (CON PANTALLA, APANTALLADO)

(EZ-RJ45 ESPECIAL)

REF. RJ45EZF5







EZ-RJ45® Cat 5E FTP Connector



PART REFERENCE

RJ45EZF5

- EIGHT CONDUCTOR MODULAR PLUG
- FOR CONDUCTORS WITH AN O.D. RANGE OF .037-.041"
- USES .014 CONTACT
- FOR SOLID OR STRANDED WIRE APPLICATIONS
- FOR BOTH CAT5E AND CAT6
- MAX CABLE OD IS 0.260 INCHES
- RoHS COMPLIANT

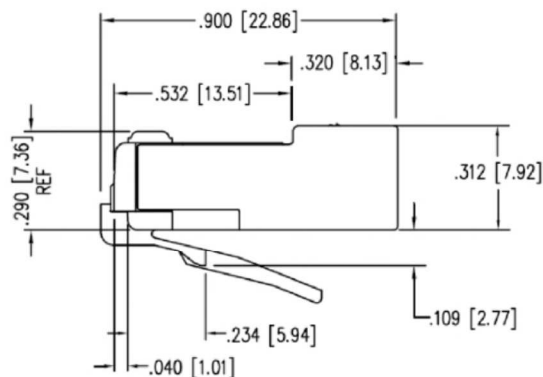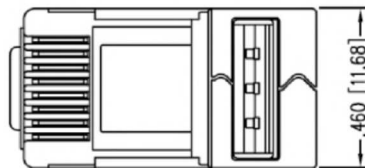

SPECIFICATIONS:

CONTACT MATERIAL:
CONTACT PLATING:

PHOSPHOR BRONZE .014 THK
50 MICRO INCH SELECTIVE 24 CARAT HARD GOLD IN CONTACT AREA OVER 100 MICRO INCH MINIMUM NICKEL PLATE.

PLUG MATERIAL:
SHIELD MATERIAL:
SHIELD PLATING:
PLUG TOLERANCES/DIMS:
OPERATION TEMPERATURE:
UL RECOGNIZED
FLAME AUTO EXTINGUISH
INSERTION/EXTRACTION
CONTACT RESISTANCE
CURRENT VOLTAGE

POLYCARBONATE
.012 THK CDA-260 1/4 HARD BRASS
100% TIN, 100-150 MICRO-INCH TIN PLATED
COMPLIES WITH F.C.C. REQUIREMENTS
-40° C TO +70° C
FILE# E188111
94-VO
1000 CYCLES
10 MILLIOHMS MAX.
30 VAC/42 VDC AT 1.5 AMPS