

# CONECTOR MACHO EZ-RJ45 CAT5E UTP (EZ-RJ45 ESPECIAL)


REF. RJ45EZU5

## EZ-RJ45® Cat 5E UTP Connector



### PART REFERENCE

RJ45EZU5

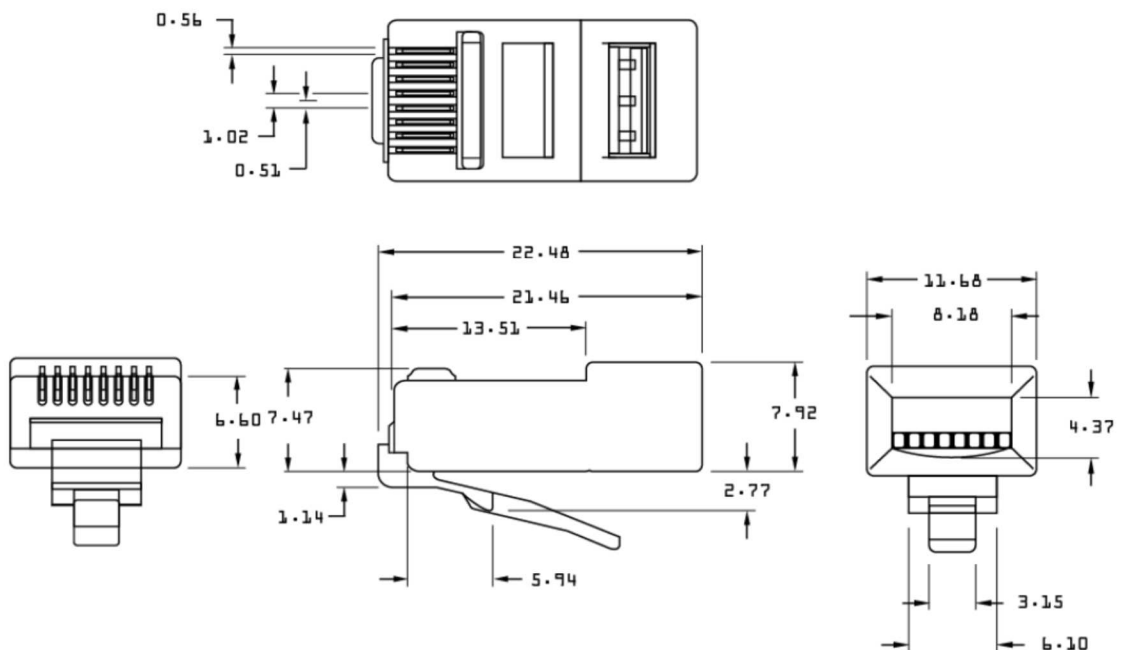

### SPECIFICATIONS

|                                |                                                                                                                       |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| MAX CABLE OD                   | 6.10MM                                                                                                                |
| MAX OD OF INSULATED CONDUCTORS | 0.94MM TO 1.04MM                                                                                                      |
| PERFORMANCE                    | MEET OR EXCEEDS CATEGORY 5E TIA/EIA 568-B.2                                                                           |
| STRANSMISSION SPEED            | UP TO 1 Gbit                                                                                                          |
| CONTACT PIN MATERIAL           | PHOSPHOR BRONZE, 50 MICRO INCH SELECTIVE 24 CARAT HARD GOLD IN CONTACT AREA OVER 100 MICRO INCH MINIMUM NICKEL PLATE. |
| BODY MATERIAL                  | POLYCARBONATE                                                                                                         |
| OPERATING TEMPERATURE          | -40 TO +80°C                                                                                                          |
| FLAME AUTO EXTINGUISH          | 94-V0                                                                                                                 |
| INSERTION/EXTRACTION           | 1000 CYCLES                                                                                                           |
| CONTACT RESISTANCE             | 10 MILLIOHMS MAX.                                                                                                     |
| CURRENT VOLTAGE                | 30 VAC/42 VDC AT 1.5 AMPS                                                                                             |