

RACK 19" 42U 800 de ancho x 1200 de fondo

Con PUERTA DELANTERA CRISTAL y PUERTA TRASERA **DOBLE** PERFORADA
REF. RC42812CPD

RC CABINET

P/N:RC



STANDARD

Comply with ANSI/EIARS-310-D, DIN41491; PART1, IEC297-2, DIN41494; PART7, GB/T3047.2-92 standard. Compatible with metric ETSI and 19 inch international standard.

FEATURES

- Exquisite design with precise craftsmanship
- Good compatibility, adapt to more servers. Perfect ventilation
- Vented front door and rear door enable ventilation and reliable operation
- The top and bottom wiring channel can be closed and adjusted.
- Optional plinth to meet under base wiring, ventilation and rat-proof
- Rack's side panel can be easily assembled.
- Efficient and solid cabinet connection
- Adjustable feet and heavy duty castors are available at the same time , static loading: 800kg.(with adjustable feet).
- Advanced lock
- Surface finish: degreasing, pickling, phosphating, powder coating
- Available in black and gray
- Height, width, and depth selectable, full range of optional accessories.

MATERIALS

Cold-rolled steel sheet. Thickness for frame 1.2mm, mounting rail 2.0mm(1.5mm for 600mm depth cabinet), fixed shelf 1.2mm , side panel 1.2mm. Thickness for smoky grey glass 5mm.

APPLICATION

Widely applied in finance, securities and data center; adopted by the professional servers' network providers as IBM, SUN, HP, COMPAQ, DELL etc.



Crescent lock



asily assembled side panel



Symmetrical frame



Fixed shelf



Cooling fan



Bottom plate




Mounting rail with U mark







Rectangle venthole

STRUCTURAL

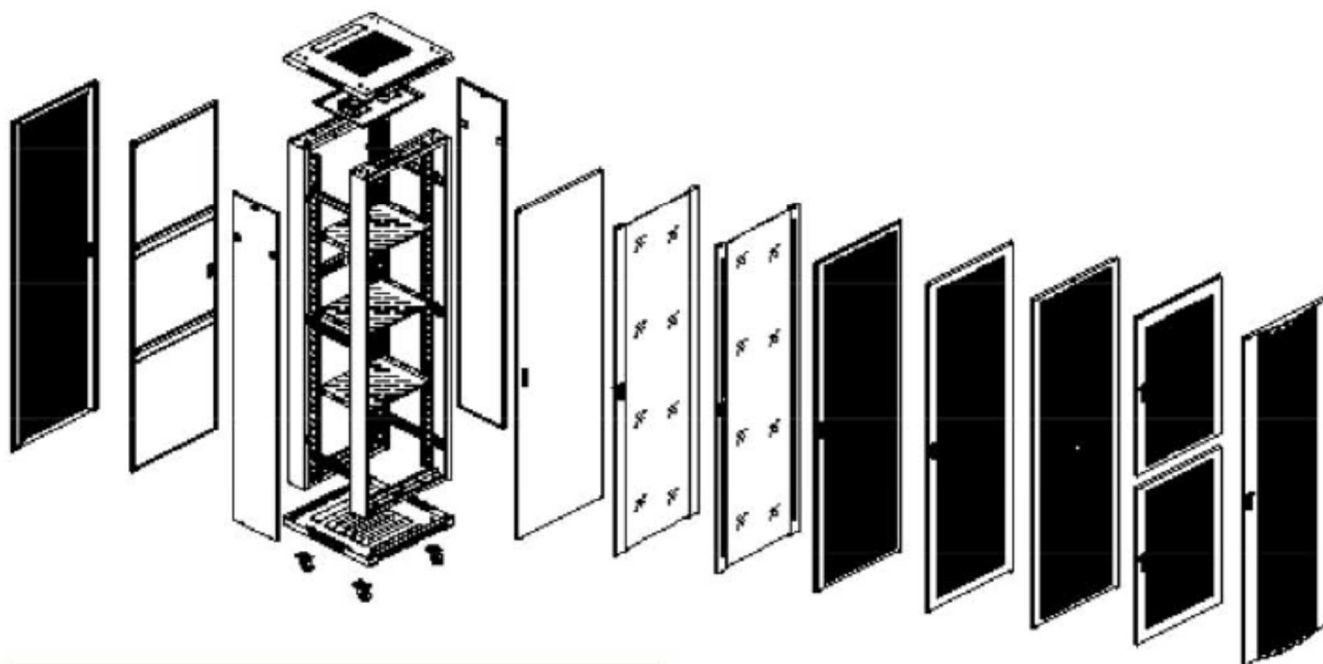

DIMENSION (MM)


mm Unit of Measurement:mm

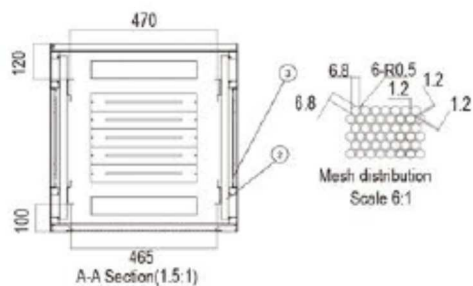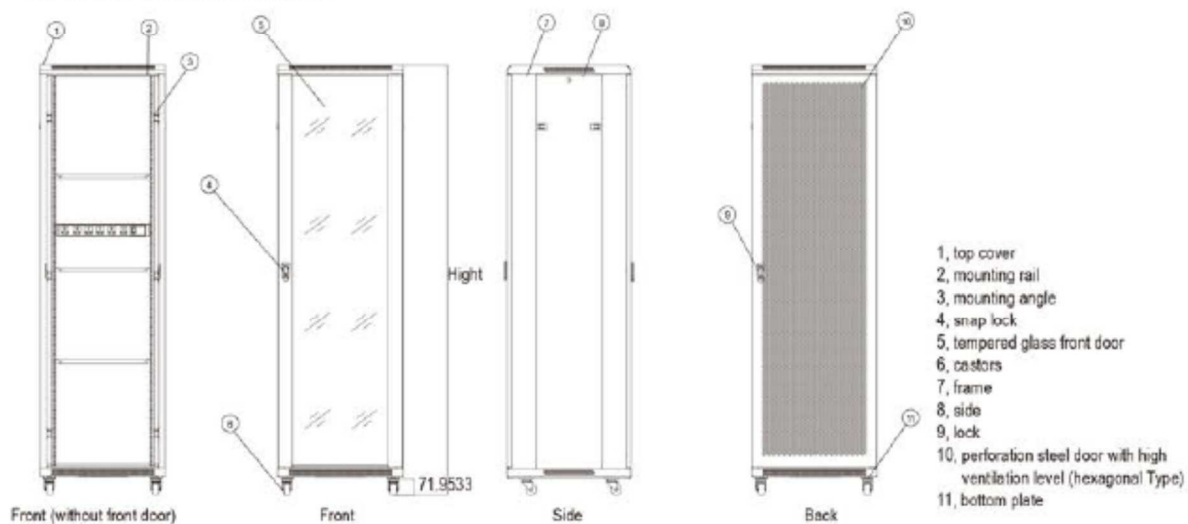

STANDARD ACCESSORIES

S/N	Specification	Qty	Unit	Material	surface finish	Remark
1	Top cover	1	Pcs	1.2mm cold rolled steel	Powder coated	---
2	Frame (nine-fold section steel)	2	Pcs	1.2mm cold rolled steel	Powder coated	---
3	Front door	1	Pcs	1.2mm cold rolled steel	Powder coated	type door
4	Side panel	4	Pcs	1.2mm cold rolled steel	Powder coated	With lock
5	Left rear door	1	Pcs	1.2mm cold rolled steel	Powder coated	A type door
6	Lock	1	Pcs	---	---	---
7	Mounting rail	6	Pcs	2.0mm cold rolled steel	Powder coated	1.5mm for 66
8	Mounting angle	4	Pcs	1.2mm cold rolled steel	Powder coated	---
9	Bottom plate	6	Pcs	1.2mm cold rolled steel	Powder coated	---
10	Spacer	2	Pcs	---	---	Width 800mm
11	Fixed shelf	1	Pcs	1.2mm cold rolled steel	Powder coated	2pcs under 32u, 1pcs under 22u
12	Heavy duty castors	4	Pcs	---	---	---
13	Feet	4	Pcs	---	---	---
14	Cage and nuts	40	sets	---	---	20pcs under 32u
15	Fan	4	Pcs	---	---	2 fans for 600mm depth
16	6-way power strip	1	Pcs	---	---	---
17	Wrench	1	Pcs	---	---	---

PUERTA DELANTERA DE CRISTAL

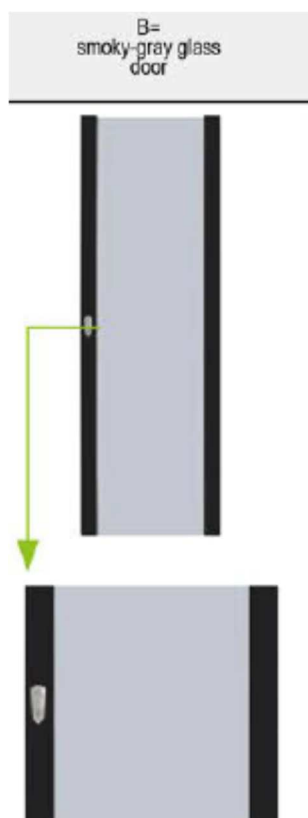

PUERTA TRASERA DOBLE PERFORADA /VENTILADA

