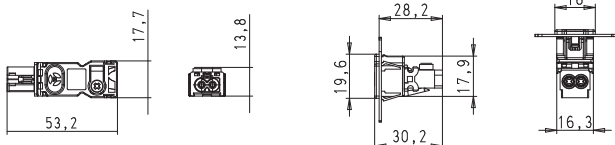

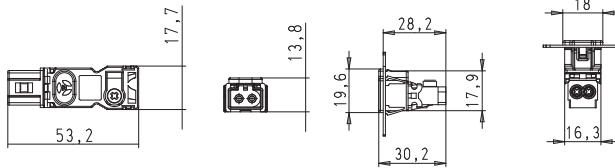



GST 15i 2 pole 250 V/16 A/6 A


Available for delivery in the
4th quarter of 2006

Connectors


Appliance couplers

			with strain relief for cable diameters of 6.0 – 8.5 mm (H05VV-F, NYM) ²⁾ Wire range: 0.75 – 1.5 mm ² solid and fine-stranded without ferrule, with locking device Sheath strip length: 21 mm Insulation strip length: 8 mm		Material thickness: 0.5 – 1.5 mm snaps into place in cut-out ¹⁾ , 1 connection point per pole with screw , solid and fine-stranded cables 0.5 – 1.5 mm ² with locking device Insulation strip length: 8 mm	
Application	Coding	Color	Part No.	Std. Pack	Part No.	Std. Pack
Female connector			 		 	
Mains 250 V / 16 A	Code 1		white black	91.921.3053.0 91.921.3053.1	91.921.9053.0 91.921.9053.1	
Dimming 250 V / 6 A	Code 2		pastel blue	91.921.3453.0	91.921.9453.0	
Low voltage ³⁾ 50 V / 16 A	Code 3		light blue	91.921.3353.0	91.921.9353.0	
Type			GST15i2S B1 ZR1 WS		GST15i2S B1 R WS	
Application	Coding	Color	Part No.	Std. Pack	Part No.	Std. Pack
Male connector			 		 	
Mains 250 V / 16 A	Code 1		white black	91.922.3053.0 91.922.3053.1	91.922.9053.0 91.922.9053.1	
Dimming 250 V / 6 A	Code 2		pastel blue	91.922.3453.1	91.922.9453.1	
Low voltage ³⁾ 50 V / 16 A	Code 3		light blue	91.922.3353.1	91.922.9353.1	
Type			GST15i2S S1 ZR1 WS		GST15i2S S1 R WS	

Cut-out dimensions:



Cut-out dimensions:



²⁾ Other cables available on request

³⁾ Coding for low-voltage applications
50 V, 16 A

¹⁾ Housing material, paint and deburring
may influence the tight fit inside the
housing. Detailed installation instructions
available on request.