
CONECTOR RJ45 MACHO SFTP CAT5E y CAT6 AWG22-24 Tipo INDUSTRIAL (Admite SALIDA de CABLE de hasta 9mm)

Ref. 38293



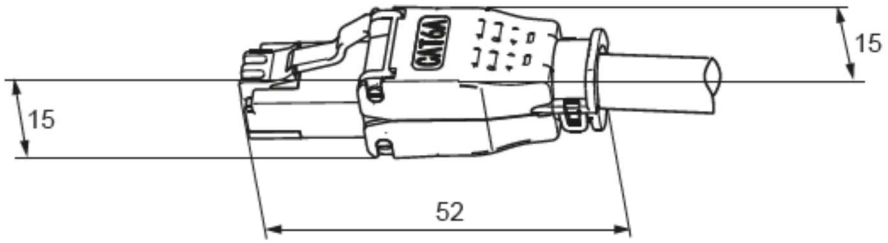

Werkzeugfreier RJ45 Stecker
- geschirmt mit Zugentlastung
- passend für Rundkabel, max. Kabeldurchmesser: 9 mm
- für flexible und starre Innenleiter (AWG 22 bis 24)
- einfache und werkzeugfreie Montage
- Steckergehäuse wird einfach zusammengedrückt
- unterstützt Gigabit Übertragungen
- Kabelkontakte farblich markiert

- Anschlüsse:	RJ45-Stecker (8P8C), LSA
- Kontakte:	3µ vergoldet
- Kategorie:	6; 250 MHz
- Schirmung:	STP
- Gehäuse:	Zink-Druckguss
- Gewicht:	11,5 g
- Konformität:	RoHS

Tool-free RJ45 network connector
- shielded with strain relief
- suitable for round cable, max. cable outer diameter: 9 mm
- for stranded and solid inner conductor (AWG 22 to 24)
- easy and tool-free assembly
- simply press down on the connector housing
- supports transmission rates on the order of gigabits
- cable contacts marked in colour

- Connections:	RJ45 plug (8P8C), LSA
- Contacts:	3µ gold-plated
- Category:	6; 250 MHz
- Shielding:	STP
- Housing:	Zink alloy
- Weight:	11.5 g
- Compatibility:	RoHS

STP shielded with strain relief
For stranded and solid inner conductor (AWG 22 to 24)
Simply press down on the connector housing
Cable contacts marked in colour

Suitable for round cable, max. cable outer diameter: 9 mm
Easy and tool-free assembly
Supports transmission rates on the order of gigabits
Waterproof class IP20

Technical specifications

Connections

Connection, type RJ45 male (8P8C)
Connection 2, type for IDC connectors (toolless)
Connection, contact material gold-plated 3µ
Waterproof class IP20

Cable

Shielding class STP
Specification CAT5E and CAT 6

General

Packaging type Bulk
Consumption Unit 1 pc. in polybag
Material zinc die-cast
Markings CE
Length 52 mm
Width 15 mm
Height 15 mm

