










FARBE/COLOR	PANTONE/RAL
WEISS/WHITE	RAL 9003
GELB/YELLOW	PANTONE 620C
ROT/RED	PANTONE 1797C
SCHWARZ/ BLACK	RAL 9017
GRAU/GREY	PANTONE 420C
GRAU/GREEN	PANTONE 7480C
BLAU/BLUE	PANTONE 7690C

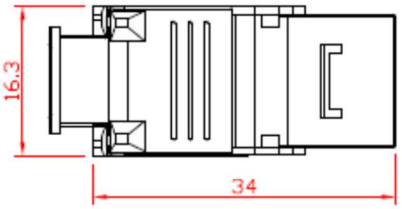



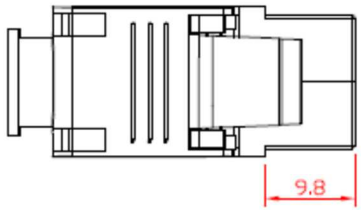

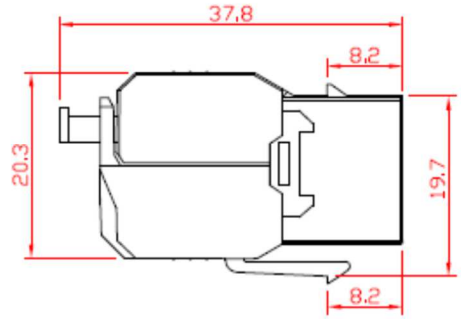



Art.	Farbe / *Colour*	Abb. / *Fig.*
90687	grün / *green*	
90688	blau / *blue*	
90689	rot / *red*	
90690	orange / *orange*	
90691	gelb / *yellow*	
90692	schwarz / *black*	
90693	hellgrau / *light grey*	
90867	weiss / *white*	

Keystone Modul RJ45
CAT 6A, UTP

- Zum Einbau in Keystone Patchpanel, Dosen und Gehäusen usw.
- Anschlüsse sind TIA 568A/B farbkodiert
- Anschlüsse: RJ45-Buchse (8P8C)/ Klemmleiste für LSA Montage
- Bauform: Krokodil-Typ
- Signalübertragung: 500 MHz
- Nettogewicht: 9g
- RoHS konform

Keystone module RJ45
CAT 6A, UTP

- can be mounted in Keystone panels or wall outlets
- connectors have TIA 568A/B colour code
- Connections: RJ45 socket (8P8C) / terminal strip for LSA mounting
- Signal transmission: 500 MHz
- Net weight: 9g
- RoHS comliant

FEATURES:
1. CABLE DIAMETER 5.0 - 9.0 MM
2. FOR SOLID WIRES 0.48 ~ 0.65MM, AWG 22~26
3. NOT SUITABLE FOR STRANDED WIRE
4. SUITABLE FOR POE+ ACCORDING TO IEEE 802.3AT
5. TEMPERATURE RANGE: -20C ~ + 85 C

NOTES:
ELECTRICAL:
1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

MECHANICAL:
1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSINGG MATERIAL:PC
3. INSERT MATERIAL:FAME RETARDANCY PBT
4. PCB MATERIAL:FR-4 T=1.6mm
5. CONTACT MATERIAL:PHOSPHOR BRONZE STAMP PIN T=0.30mm
6. IDC CONTACT MATERIAL:PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
7. RJ45 JACK ;IFE:750 TIMES MIN
8. IDC LIFE:200 TIMES MIN