

HDC 43




Straight DDF mount cable plug.

HDC 43 DDF plugs are designed to fit to standard HDC distribution frames with B2 mounting blocks. The blue plastic C clip snaps into the mounting block allowing a small amount of float to aid alignment when fitting U links.

Centre and outer contact are gold plated and terminated by crimping. Suitable tooling can be found in the Accessories & Tooling section of this catalogue.

Part Number	Cable Types	Cable Group	Cable Dimensions (nominal Ø mm) Conductor - Insulation - Jacket			Centre Contact	Outer Contact	Assembly Procedure	Telecom Industry Designation
43-012-D6-AB	RG179, RG187, Belden 179DT	AB	0.3	1.5	3	0.95 Sq	3.25 Hex	AP023	Plug HDC43/4GTIS
43-012-D6-AC	RD 179	AC	0.3	1.6	3	0.95 Sq	3.84 Hex	AP023	
43-012-D6-BD	BT3002, TZC 75024	BD	0.3	1.9	4	0.95 Sq	4.52 Hex	AP023	Plug HDC43/5GTIS
43-012-D6-BF	BT7000, RA7000	BF	0.6	2.8	5	0.95 Sq	5.18 Hex	AP023	Plug HDC43/7GTIS
43-012-D6-BG	RA8000	BG	0.3	1.4	3	0.95 Sq	3.25 Hex	AP023	Plug HDC43/8GTIS
43-012-D6-BI	1.6 mm Dia Micro Coax	BI	0.3	1.1	2	0.95 Sq	3.25 Hex	AP024	
43-012-D6-BJ	2.2 mm Dia Micro Coax	BJ	0.3	1.2	2	0.95 Sq	3.25 Hex	AP024	



Assembly Procedure - see table and for details go to www.coax-connectors.com/ap

HDC 43

Straight cable socket.

HDC 43 sockets provide a secure, positive lock when mated with an equivalent HDC plug and are identified with a blue band on the body.


The socket locks to the mating plug by sliding the front sleeve forward, when the sleeve is released the plug and socket are locked and can only be uncoupled by sliding the sleeve back.

Space permitting, HDC sockets will fit to any plug in the Type 43 range.

Centre and outer contact are gold plated and terminated by crimping. Suitable tooling can be found in the Accessories & Tooling section of this catalogue.



Part Number	Cable Types	Cable Group	Cable Dimensions (nominal Ø mm) Conductor - Insulation - Jacket			Centre Contact	Outer Contact	Assembly Procedure	Telecom Industry Designation
43-061-D6-AB	RG179, RG187, Belden 179DT	AB	0.3	1.5	3	0.95 Sq	3.25 Hex	AP023	Socket HDC43/4FS
43-061-D6-BD	BT3002, TZC 75024	BD	0.3	1.9	4	0.95 Sq	4.52 Hex	AP023	Socket HDC43/5FS
43-061-D6-BF	BT7000, RA7000	BF	0.6	2.8	5	0.95 Sq	5.18 Hex	AP023	Socket HDC43/7FS
43-061-D6-BG	RA8000	BG	0.3	1.4	3	0.95 Sq	3.25 Hex	AP023	Socket HDC43/8FS
43-061-D6-BI	1.6 mm Dia Micro Coax	BI	0.3	1.1	2	0.95 Sq	3.25 Hex	AP024	
43-061-D6-BJ	2.2 mm Dia Micro Coax	BJ	0.3	1.2	2	0.95 Sq	3.25 Hex	AP024	

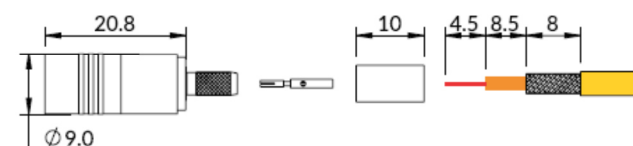

Assembly Procedure - see table and for details go to www.coax-connectors.com/ap