


FILE AMEND NOTE	DATE	REV.
ORIGINAL EDITION	MAR 25 2016	B/0

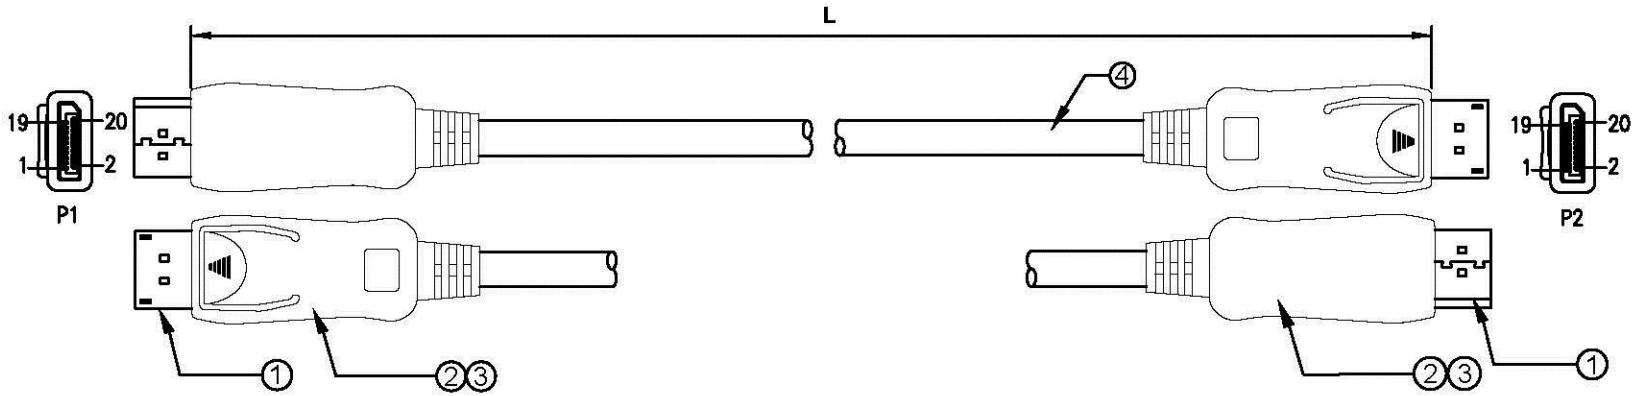

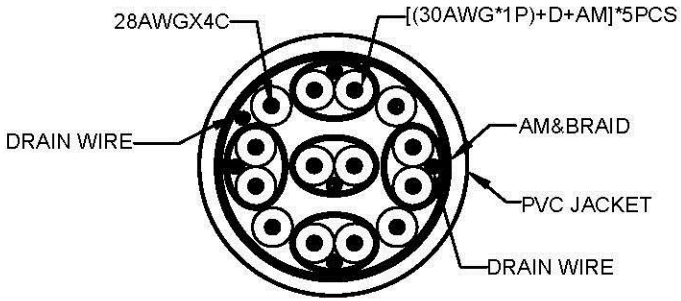

PIN OUT

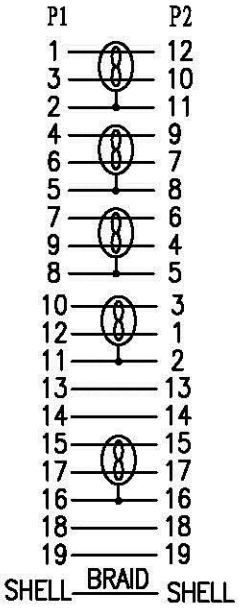

NOTE:

1.Electrical properties:

1.ALL COMPONENTS ARE RoHS COMPLIANT.
2.100% OPEN AND SHORT TEST.
3.CONDUCTOR RESISTANCE:3 OHMS
4.INSULATION RESISTANCE:10 MEGOHMS.
5.HI-POT:DC200V/0.01S
6.PC TEST 4K*2K 60Hz PASS 1080P PASS

2. ROHS 2.0 and REACH

MODEL LIST

Model	Length
11.99.5601	1000mm
11.99.5602	2000mm
11.99.5603	3000mm
11.99.5605	5000mm

MATERIAL LIST

No.	PART NAME	DESCRIPTION	QTY
④	CABLE	(7/0.10BC*1P+7/0.10BC+ AM)* 5PCS+7/0.12BC*4C+AM+7/0.12BC+128/0.12 AL-MG+PVC, OD: 7.3±0.1mm, COLOR: BLACK	L
③	OUTER MOLD	BLACK ABS	2
②	INNER MOLD	LD-PE	2
①	CONNECTOR	DisplayPort MALE , GOLD PLATED PIN, Nickel PLATED SHELL	2

SECOMP					
DRAW No.		NAME	DP CABLE 4K*2K/ 60Hz		
CUSTOMER			MAPE	TOLERANCE	
MODEL No.	11.99.560X-1~5M			X. ±1.00 X.X ±0.50	
APPROVE BY	CHECK BY		DRAW BY	SCALE	MM
				PAGE	1/1