Cableados y Conexiones

COAXIAL




Crimp plugs.

The extensive range of 75 ohm BNCs covers all requirements from general purpose communications connections to high performance True 75 ohm Broadcast and Telecom applications.

Inner contacts are gold plated, outer contacts are nickel plated or, in the case of the 6GHz KORUS connectors, gold plated. The crimp sleeve and inner contact are annealed to provide optimum crimping performance, and designs to suit the cables listed, are available.

Outwardly, the True 75 ohm BNCs may not look any different from a general purpose BNC, however what is inside makes the difference. The design of the internal dimensions and the connector construction are carefully optimised to make our True 75 ohm BNC suitable for the demands of 'High Definition and Beyond'. Detailed performance data is available on request.

Part Number	Typical Cable Types (for more visit website)	Cable Group	Cable Dimensions (nominal Ø mm) Conductor	Insulation	Jacket	Centre Contact	Outer Contact	Features
6GHz Crimp Plugs - True 75 ohm, including 'KORUS' range								
10-005-D66-FA	1855DNI (0.6/2.8AF, BD55D0, Image360	FA	0.6	2.8	4.5	1.72 Hex	5.41 Hex	
10-005-W66-FA	1855DNI (0.6/2.8AF, BD55D0, Image360	FA	0.6	2.8	4.5	1.72 Hex	5.41 Hex	'KORUS' (Black Coupling Nut)
10-005-D66-FB	1505A, 0.8/3.7, Image:720	FB	0.8	3.7	6	1.72 Hex	6.50 Hex	
10-005-W66-FB	1505A, 0.8/3.7, Image:720	FB	0.8	3.7	6	1.72 Hex	6.50 Hex	'KORUS' (Black Coupling Nut)
10-005-D66-FC	1694A/F, 1.0/4.8AF, BD6D11, Image:1000	FC	1	4.8	7	1.72 Hex	8.23 Hex	
10-005-W66-FC	1694A/F, 1.0/4.8AF, BD6D11, Image:1000	FC	1	4.8	7	1.72 Hex	8.23 Hex	'KORUS' (Black Coupling Nut)
10-005-B36-FD	7731A, 1.6/7.3AF, Image:2000	FD	1.6	7.2	10	2.54 Hex	10.9 Hex	
10-005-W66-FD	7731A, 1.6/7.3AF, Image:2000	FD	1.6	7.2	10	2.54 Hex	10.9 Hex	'KORUS' (Black Coupling Nut)

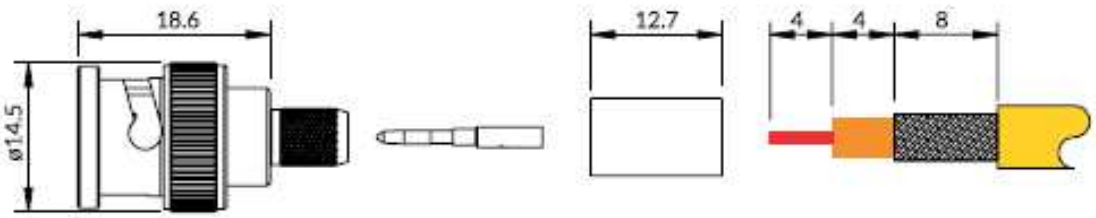

© 2017 Cableados y Conexiones S.L.
Caycon
C/ Ciudad de Frías nº23 Nave 2 28021 Madrid
Tfno:91 428 00 36 - 91 471 54 32 Fax: 91 471 09 87
info@caycon.es http://www.caycon.es

Cableados y Conexiones

COAXIAL

Part Number	Typical Cable Types (for more visit website)	Cable Group	Cable Dimensions (nominal Ø mm) Conductor - Insulation - Jacket			Centre Contact	Outer Contact	Features
3GHz Crimp Plugs - True 75 ohm								
10-005-B36-AB	RG179, RG187, Belden179DT	AB	0.3	1.5	3	1.07 Sq	3.25 Hex	
10-005-T36-AB	RG179, RG187, Belden179DT	AB	0.3	1.5	3	1.07 Sq	3.25 Hex	Black Coupling Nut
10-005-B36-AI	RG59, RG62, URM70	AI	0.6	3.7	6	1.72 Hex	6.50 Hex	
10-005-T36-AI	RG59, RG62, URM70	AI	0.6	3.7	6	1.72 Hex	6.50 Hex	Black Coupling Nut
10-005-B36-BC	BT2003, PSF 1/3	BC	0.6	3.7	7	1.46 Hex	6.50 Hex	**
10-005-T36-BC	BT2003, PSF 1/3	BC	0.6	3.7	7	1.46 Hex	5.41 Hex	Black Coupling Nut
10-005-B36-BD	BT3002, TZC75024	BD	0.3	1.9	4	1.46 Hex	4.52 Hex	**
10-005-B36-BF	BT7000, RA7000	BF	0.6	2.8	5	1.46 Hex	5.18 Hex	
10-005-B36-BG	RA8000	BG	0.3	1.4	3	1.07 Sq	3.25 Hex	
10-005-B36-EG	59U Quad	EG	0.8	3.6	7	1.72 Hex	8.23 Hex	
10-005-T36-EG	59U Quad	EG	0.8	3.6	7	1.72 Hex	8.23 Hex	Black Coupling Nut
10-005-B36-FA	1855CNH (, 0.6/2.8Af, BD5D0, Image:360	FA	0.6	2.8	4.5	1.72 Hex	5.41 Hex	**
10-005-T36-FA	1855CNH (, 0.6/2.8Af, BD5D0, Image:360	FA	0.6	2.8	4.5	1.72 Hex	5.41 Hex	Black Coupling Nut
10-005-B36-FB	1505A, 0.8/3.7, Image:720	FB	0.8	3.7	6	1.72 Hex	6.50 Hex	
10-005-T36-FB	1505A, 0.8/3.7, Image:720	FB	0.8	3.7	6	1.72 Hex	6.50 Hex	Black Coupling Nut
10-005-B36-FC	1694A/T, 1.0/4.8Af, BD5D11, Image:1000	FC	1	4.5	7	1.72 Hex	8.23 Hex	**
10-005-T36-FC	1694A/T, 1.0/4.8Af, BD5D11, Image:1000	FC	1	4.5	7	1.72 Hex	8.23 Hex	Black Coupling Nut
10-005-B36-FE	Belden 1505F, BD5D50F	FE	0.8	3.6	6	1.72 Hex	6.50 Hex	
10-005-B36-FF	DRAKA 1.2L/4.8DZ	FF	1.2	4.8	7	1.72 Hex	8.23 Hex	
10-005-B36-FH	Conducfil 14510 & 14511	FH	1.4	6.4	9.2	2.54 Hex	10.9 Hex	
Standard 75 ohm Crimp Plugs								
10-006-A0-AB	RG179, RG187, Belden179DT	AB	0.3	1.5	3	1.72 Hex	5.41 Hex	4 Part*
10-005-A0-AF	Mini RG59 Black	AF	0.6	2.9	4	1.72 Hex	5.41 Hex	
10-005-A0-AG	Mini RG59 White	AG	0.4	1.9	4	1.72 Hex	5.41 Hex	
10-005-A0-AI	RG59, RG62, URM70	AI	0.6	3.7	6	1.72 Hex	6.50 Hex	
10-005-A0-AJ	RG59 DB	AJ	0.6	3.7	6	1.72 Hex	8.23 Hex	
10-005-B6-BA	BT2001	BA	0.6	2.4	4	1.46 Hex	5.18 Hex	
10-005-A6-BB	BT2002	BB	0.6	2.4	5	1.46 Hex	5.18 Hex	
10-005-A0-BC	BT2003, PSF 1/3	BC	0.6	3.7	7	1.46 Hex	6.50 Hex	
10-005-A7-BD	BT3002, TZC75024	BD	0.3	1.9	4	1.46 Hex	4.52 Hex	**
10-005-A0-CA	CT100, RG6, WSC100	CA	1	4.6	7	1.72 Hex	8.05 Hex	
10-005-A0-CB	CT100RB5	CB	1	4.6	9	1.93 Hex	8.60 Hex	
10-005-A0-CC	CT125	CC	1.3	5.5	8	1.93 Hex	8.60 Hex	
10-005-A0-CD	CT125RB5	CD	1.3	5.6	10	1.93 Hex	9.96 Hex	
10-006-A0-CE	CT167	CE	1.7	7.2	10	1.72 Hex	10.9 Hex	4 Part*
10-006-A0-CF	CT167RB5	CF	1.7	7.2	12	1.72 Hex	11.94 Hex	4 Part*
10-005-B6-DL	LMR200-75	DL	0.6	2.9	5	1.72 Hex	5.41 Hex	
10-005-A9-DN	LMR400-75	DN	1.7	7.2	10	2.54 Hex	10.9 Hex	***
10-005-B3-EH	Flex3	EH	0.4	2.3	4	1.07 Sq	4.52 Hex	
10-005-A6-GA	PSF 1/2	GA	0.8	4.8	7	1.72 Hex	8.23 Hex	

Caycon

© 2017 Cableados y Conexiones S.L.
C/ Ciudad de Frías nº23 Nave 2 28021 Madrid
Tfno:91 428 00 36 - 91 471 54 32 Fax: 91 471 09 87
info@caycon.es http://www.caycon.es