


CABLE VGA 3 COAXIALES + 7 HILOS DE CONTROL LSZH NEGRO

3x75 Ohmios + 7x0,14mm²

caycon.es

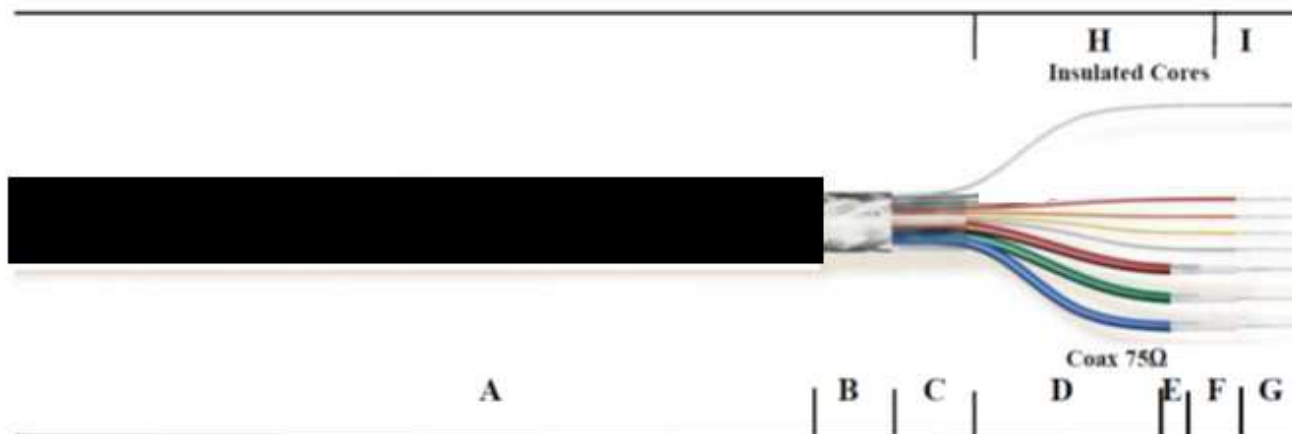

CATEGORY Special Video Cable 75Ω (See Video Catalogue)
APPLICATIONS VGA and XGA

- A:** Grey Soft **Flame Retardant PVC** Or **LSZH (HALOGEN FREE) CUSTOM**
Outer Diam. Ø 7,60 (±0,20) mm.
B: O.F.C. Tinned Copper Braid Shielding, covering 80% + drain Wire.
C: Grouping with unweaved polyester tape.

3x HD Video Coax:

- D:** Sheath in **PVC HT 105°** - Colored: Red, Green and Blue.
Diam. Ø 2,40 (±0,20) mm.
E: O.F.C. tinned copper spiral shielding, covering 100%.
F: Insulated in PPE. Diam. Ø 1,40 (±0,20) mm.
G: Stranded in O.F.C. tinned copper formation 7x0,12 mm.
Nom. section 3x0,08 mm² (75Ω).

7x Insulated Cores:

- H:** Sheath in **PVC HT 105°** - Colored: White, Brown, Red, Orange, Yellow,
Green, Black. Diam. Ø 0,90 (±0,20) mm.
I: Stranded in O.F.C. tinned copper formation 7x0,12 mm.
Nom. section 7x0,14mm²

CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, PE, PUR,
with or without Metallic Armor.

Cable Properties

Conductors Resistance	138 Ω/km
Impedance	100 Ω
Max Rated Voltage	30 V
Operative Temperature	-15+70°C

Attenuation dB/10mt.

From 1,0 to 825,0 MHz	5,0
From 825 to 2.475 MHz	12,0
From 2475 to 4125 MHz	20,0
From 4125 to 5,100 MHz	25,0

caycon.es