

Prensaestopas de NYLON con protector de cable




E 186042



Material: Nylon 66 homologado UL 94V-2.

Color: ■ Negro.

Ref.	Orificio de montaje D1	Dimensiones mm.				L1	L2	L3	Para cable	
		Paso	D2	B1						
AG-12SR	12	1.25	8.3	6.0	7.9	12.1	53.3	3-6.5	50	
AG-16SR	16	1.5	10.9	9.6	14.4	14.4	74.9	5-10	50	
AG-20SR	20	1.5	14.8	12.9	12.8	19.5	96.2	10-14	50	
AG-25SR	25	1.5	18.5	16.5	13.9	19.5	111.2	13-18	25	
EG-7SR	11.7	1.5	8.0	6.0	8.0	12.8	53.3	3.5-6	50	
EG-9SR	14.3	1.5	9.9	7.0	8.1	13.9	62.5	4-8	50	
EG-11SR	17.3	1.5	13.2	9.6	8.2	15.4	74.9	5-10	50	
EG-13.5SR	19.3	1.5	15.2	11.7	8.9	15.8	85.5	6-12	50	
EG-16SR	21.3	1.5	17.2	12.9	8.9	17.3	96.2	10-14	50	
EG-21SR	27	1.5	22.4	16.5	10.8	18.6	111.2	13-18	25	
AGJ-14SR	14	1.5	8.04	6.33	8.07	12.15	53.3	3-6.5	50	
AGJ-17SR	17	1.5	10.76	10.25	14.63	14.53	74.9	5-10	50	
AGJ-21SR	21	1.5	14.98	13.5	12.87	19.6	96.2	10-14	50	
AGJ-27SR	27	1.5	18.37	18.65	14.66	18.45	111.2	13-18	25	

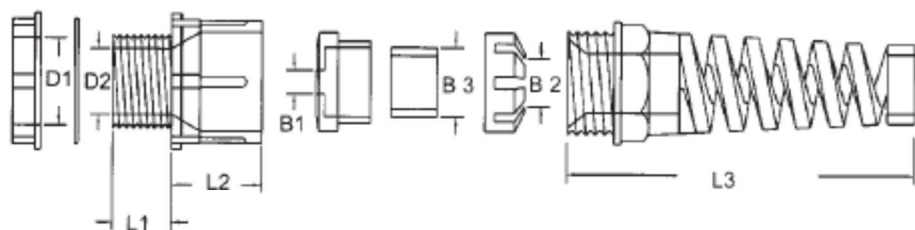

Ref.	Orificio de montaje D1	Dimensiones mm.				B2	B3	L1	L2	L3	Para cable	
		D2	Paso	B1								
PG-1610	16	10.9	1.5	4.8	7	10	12	17	62	5-10	50	
PG-2013	20	14.1	1.5	5.1	9	13	13	19	78	6-13	50	