



MICRO BNC PLUG TO BNC JACK STRAIGHT ADAPTOR

74-1067-534

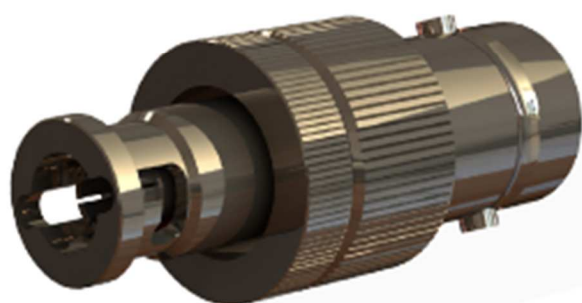

Images for illustration purposes only

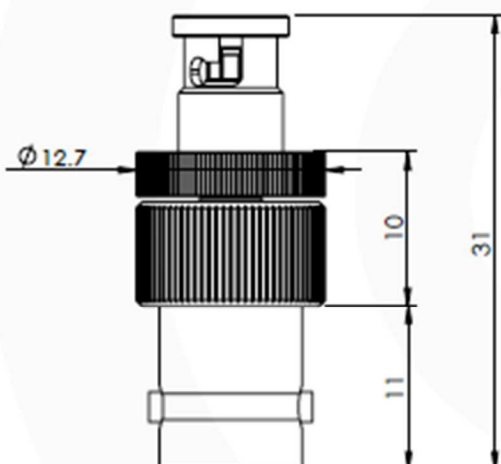

4	GASKET	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A05	NAME	SIGNATURE
ISSUE :	3	DRAWN	IG
		CHK'D	GE
		APP'D	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR	

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 14.00 g

Connector Interface

Image for illustration purposes only

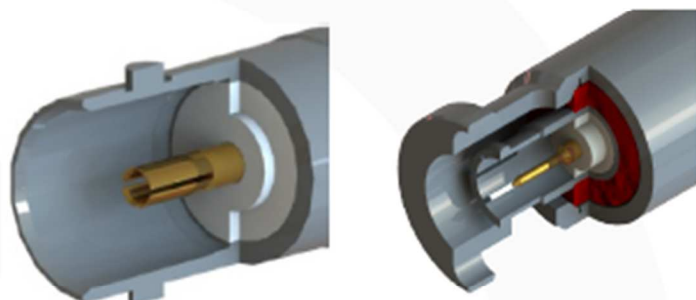

Performance

-15.56 dB @ 3.0 GHz

-17.11 dB @ 6.0 GHz

-11.45 dB @ 12.0 GHz

-14.96 dB @ 18.0 GHz

Return Loss Graph

