


MICRO BNC STRAIGHT JACK TO BNC PLUG ADAPTOR

Ref. 741067511



Images for illustration purposes only

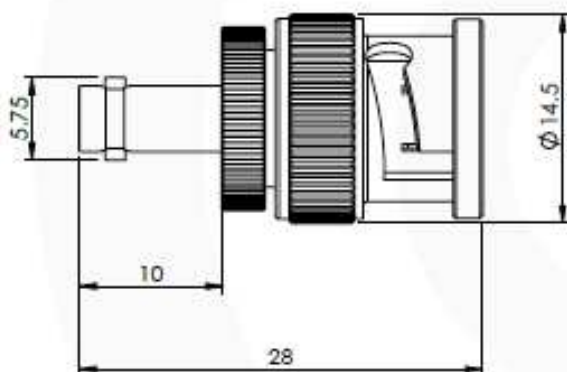

6	WASHERS	SKS	NICKEL
5	COUPLING NUT	ZINC	NICKEL
4	GASKET	SILICONE	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
------	-------------	----------	---------

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLISECONDS	
----	--------------	--------------------------------	--

REVISION :	B03	NAME	SIGNATURE	DATE
------------	-----	------	-----------	------

ISSUE :	2	DRAWN	IC	21/07/2015
---------	---	-------	----	------------

		CHK'D	GE	22/07/2015
--	--	-------	----	------------

		APP'D		
--	--	-------	--	--

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS
SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL
GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT
TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR
NOTICE

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min

Cable Retention: N/A

Mating cycles: 500

Weight: 10.86 g

Connector Interface

Image for illustration purposes only



Performance


-21.65 dB @ 3.0 GHz

-17.49 dB @ 6.0 GHz

-14.65 dB @ 12.0 GHz

-20.50 dB @ 18.0 GHz

Return Loss Graph

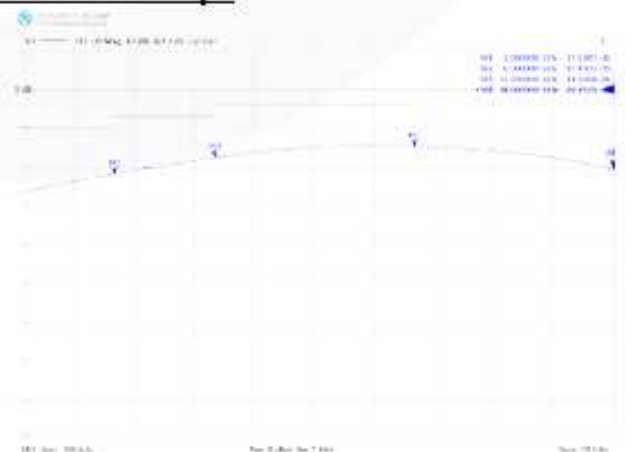

Cableados y Conexiones S.L.

