

Cableados y Conexiones


MICRO BNC STRAIGHT CRIMP / CRIMP PLUG

(HD BNC) Ref. 67005B66FA

HD BNC



Images for illustration purposes only

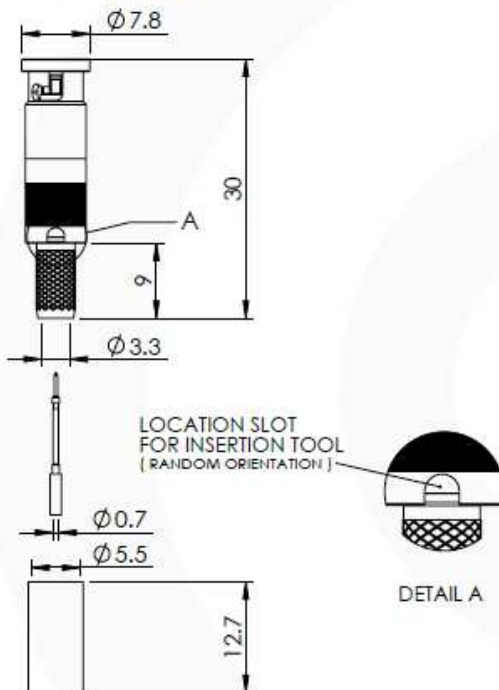


7	SPRING	STAINLESS STEEL	N/A
6	COUPLING NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A09	NAME	SIGNATURE
ISSUE :	2	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		CHK'D	DATE
		APPV'D	DATE
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			

Suitable for Cables:

Belden 4855ELW, Belden 1855ENH, Draka 0.6/2.8

Stripping Dimensions



a = 4.0 mm

b = 8.0 mm

c = 16.0 mm

d = 12.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: SQ 0.95mm A/F Tool No: 96-HTS-75

Crimp Sleeve: Hex 5.41mm A/F Tool No: 96-HTS-75

Alignment Tool: Not Applicable Extraction: 96-1132

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1000 Veff

Insulation res: 10000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 5.60 g

Connector Interface

Image for illustration purposes only



-28.77 dB @ 3.0 GHz
-20.11 dB @ 6.0 GHz
-15.43 dB @ 12.0 GHz
-13.41 dB @ 15.0 GHz

Return Loss Graph

