


BNC INSULATED BULKHEAD JACK TO JACK ADAPTOR 12 GHz

10-503-B126



images for illustration purposes only

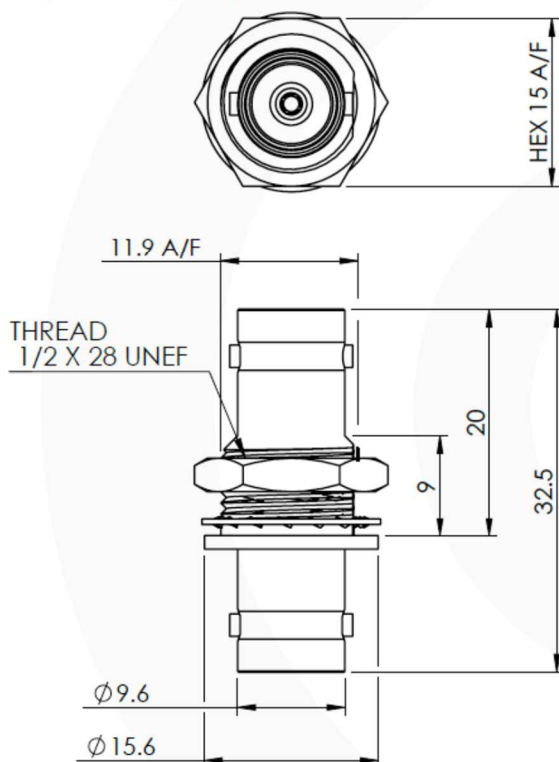

6	WASHER	SK5	NICKEL
5	NUT	BRASS	NICKEL
4	INSULATION	ABS	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
------	-------------	----------	---------

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
----	--------------	-------------------------------	--

REVISION :	A00	NAME	SIGNATURE	DATE
------------	-----	------	-----------	------

ISSUE :	2	DRAWN	G.E.	16-Jan-18
---------	---	-------	------	-----------

		CHK'D	I.G.	16-Jan-18
--	--	-------	------	-----------

		APPV'D		
--	--	--------	--	--

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS
SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL
GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT
TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR
NOTICE.

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -35 to +70 Deg C

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 18 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification


Contact Retention: 10 N min

Cable Retention: N/A

Mating cycles: 500

Weight: 14.75 g

Recommended Mounting Hole



5.0 MAX PANEL THICKNESS

Connector Interface



image for illustration purposes only

Performance

- 28.0203 dB @ 3.0 GHz
- 25.8473 dB @ 4.5 GHz
- 24.2132 dB @ 6.0 GHz
- 23.3678 dB @ 9.0 GHz
- 33.2842 dB @ 12.0 GHz
- 12.7172 dB @ 18.0 GHz

Return Loss Graph

