



In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	D/S-C-000409	D.M	M.S	6.12.19					.
									.
									.

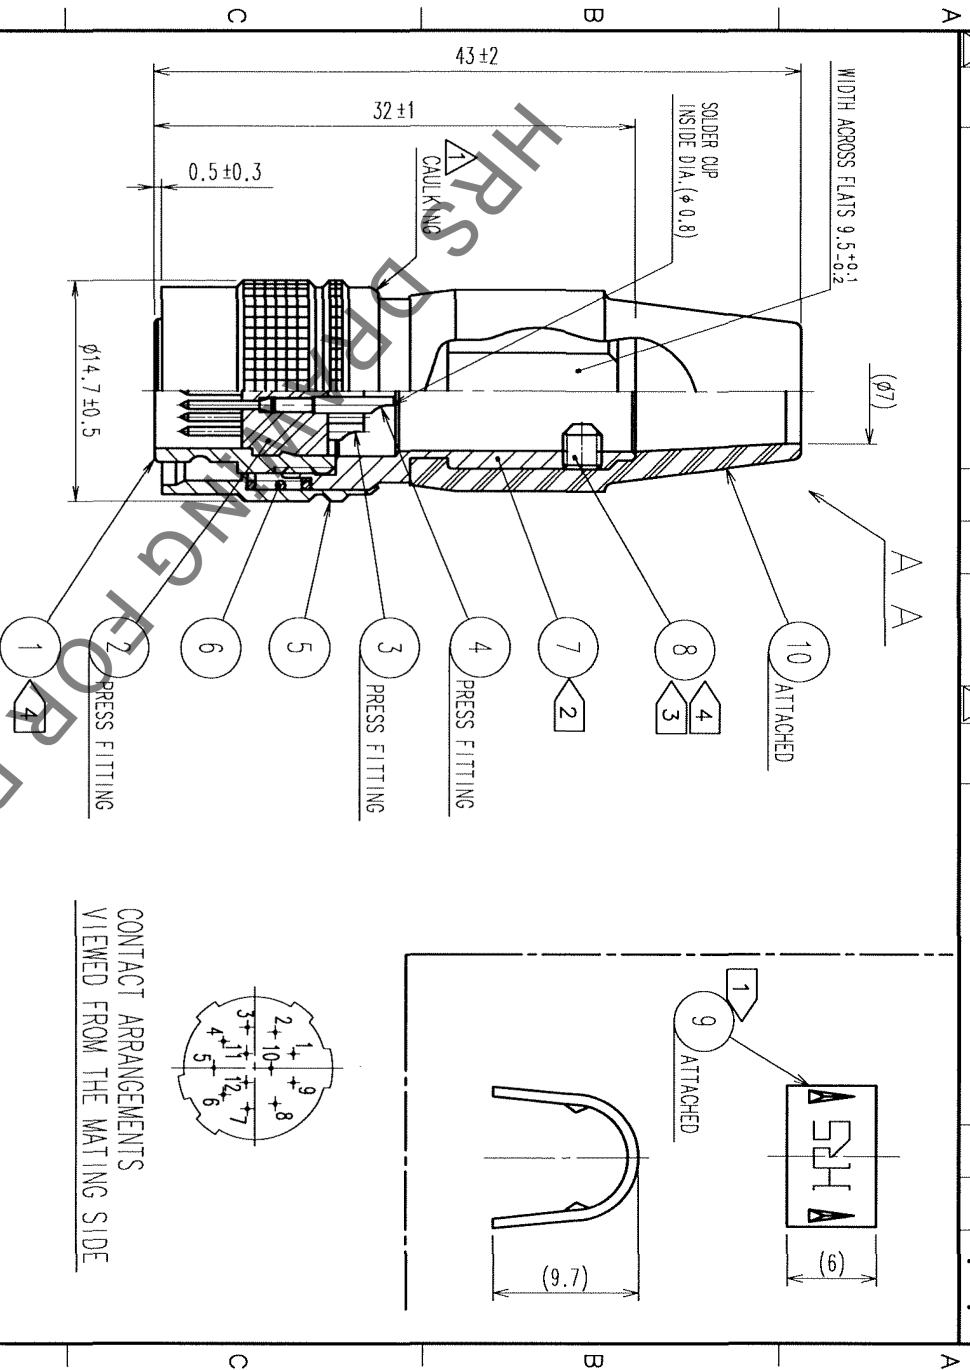

NOTE 1 HAND CRIMPING TOOL, REF. NO. ⑨ : HR10A-TC-02, APPLY TO φ 7.
2 THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑦ : 2-2.5 N · m.
3 ACROSS FLATS HEXAGON HEAD OF REF. NO. ⑧ : 1.27
THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑧ : 0.3-0.4N · m.
4 LOCTITE 242, HEKEL JAPAN OR EQUIVALENT IS
RECOMMENDED TO PREVENT REF. NO. ① AND ② FROM LOOSENING.
5 ONE EXAMPLE OF THE ROTATION OF REF. NO. ⑦ TO
REF. NO. ① IS SHOWN.



5	BRASS	MATTE FINISH NICKEL PLATING	10	CR	(BLACK)
4	BRASS	GOLD PLATING 0.2μm min.	9	BRASS	
3	BRASS	NICKEL UNDER PLATING 2μm min.	8	STEEL	JIS C 1177 HEXAGON SOCKET SET SCREW M2.6×0.45×3
2	POLYAMIDE	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	6	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		H.KISHI	H.KISHI	E.KUNII	M.SATO	
		'05.08.31	'05.08.31	'05.09.02	'05.09.02	

SAFETY	DRAWING NO.	PART NO.	CODE NO.	1
2 : 1	EDC4-010386-74	HR10A-10P-12P (74)	CL110-0401-7-74	1
UNITS	mm			1

TO
R