



BNC STRAIGHT INSULATED BULKHEAD CRIMP / CRIMP JACK


10-258-B36-FA

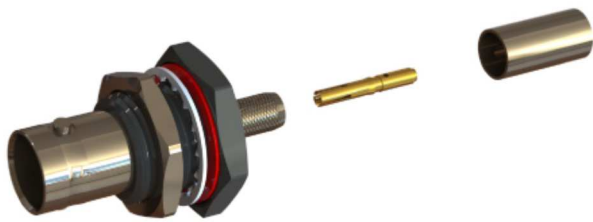

images for illustration purposes only

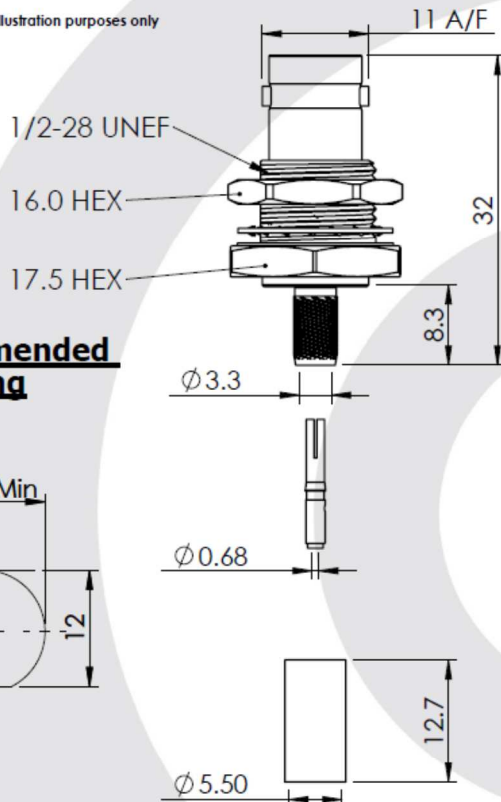

Recommended Mounting Hole



8	NUT	BRASS	NICKEL
7	WASHERS	BRASS	NICKEL
6	OVER MOULDING	ABS	N/A
5	GASKET	SILICONE	N/A
4	CRIMP SLEEVE	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
------	-------------	----------	---------

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
----	--------------	-------------------------------	--

REVISION :	A00	NAME	SIGNATURE	DATE
------------	-----	------	-----------	------

ISSUE :	1	DRAWN	IG	26/09/2013
---------	---	-------	----	------------

		CHK'D	GE	27/09/2013
--	--	-------	----	------------


6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR	APPV'D			
---	--------	--	--	--

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Suitable for Cables:

(FA) Belden 1855ENH, Draka 0.6/2.8AF, BD SD01, Image 360

Stripping Dimensions



a = 4.0 mm
b = 8.0 mm
c = 19.0 mm
d = 15.0 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: Hex 1.72mm A/F Tool No:96-HTS-75

Crimp Sleeve: Hex 5.41mm A/F Tool No:96-HTS-75

Alignment Tool: N/A

Extraction: N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-4.5 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 250

Weight: 12.94 g

Connector Interface

image for illustration purposes only



-28.9 dB @ 1.0 GHz
-22.2 dB @ 2.0 GHz
-22.2 dB @ 3.0 GHz
-17.9 dB @ 4.5 GHz

Return Loss Graph

