

# Prensaestopas de NYLON E 186042

**IP68**




## Sistema métrico

| Ref.          | Orificio de montaje D1 | Dimensiones mm. |      |      | L1   | L2   | L3   | Para cable |  |
|---------------|------------------------|-----------------|------|------|------|------|------|------------|-------------------------------------------------------------------------------------|
| Paso          | D2                     | B1              |      |      |      |      |      |            |                                                                                     |
| <b>AG-12</b>  | 12                     | 1.25            | 8.3  | 6.0  | 7.9  | 12.1 | 13.3 | 3-6.5      | 50                                                                                  |
| <b>AG-16</b>  | 16                     | 1.5             | 10.9 | 9.6  | 15.7 | 14.4 | 16.7 | 5-10       | 50                                                                                  |
| <b>AG-20</b>  | 20                     | 1.5             | 14.8 | 12.9 | 15.0 | 19.5 | 18.4 | 10-14      | 50                                                                                  |
| <b>AG-25</b>  | 25                     | 1.5             | 18.6 | 16.4 | 15.0 | 18.7 | 22.3 | 13-18      | 50                                                                                  |
| <b>AG-32</b>  | 32                     | 1.5             | 26   | 23.4 | 14.7 | 20.3 | 26.2 | 18-25      | 25                                                                                  |
| <b>AG-40</b>  | 40                     | 1.5             | 33   | 30.6 | 17.7 | 23.4 | 31.9 | 22-32      | 10                                                                                  |
| <b>AG-50</b>  | 50                     | 1.5             | 41.2 | 38.2 | 17.3 | 25.7 | 31.6 | 30-38      | 10                                                                                  |
| <b>AG-16F</b> | 20.8                   | PF1/2"          | 11   | 13   | 9.5  | 14.0 | 18.7 | 5-10       | 50                                                                                  |
| <b>AG-20F</b> | 20.8                   | 14              | 14.7 | 14.7 | 9.5  | 16.0 | 18.5 | 6-13       | 50                                                                                  |

## Sistema JIS

| Ref.          | Orificio de montaje D1 | Dimensiones mm. |       |       | L1    | L2    | L3   | Para cable |  |
|---------------|------------------------|-----------------|-------|-------|-------|-------|------|------------|-------------------------------------------------------------------------------------|
| Paso          | D2                     | B1              |       |       |       |       |      |            |                                                                                     |
| <b>AGJ-14</b> | 14                     | 1.5             | 8.04  | 6.33  | 8.07  | 12.15 | 13.3 | 3-6.5      | 50                                                                                  |
| <b>AGJ-17</b> | 17                     | 1.5             | 10.76 | 10.25 | 14.63 | 14.53 | 16.7 | 5-10       | 50                                                                                  |
| <b>AGJ-21</b> | 21                     | 1.5             | 14.98 | 13.50 | 12.87 | 19.60 | 18.4 | 10-14      | 50                                                                                  |
| <b>AGJ-27</b> | 27                     | 1.5             | 18.37 | 18.65 | 14.66 | 18.45 | 22.3 | 13-18      | 50                                                                                  |
| <b>AGJ-34</b> | 34                     | 1.5             | 25.84 | 25.31 | 14.84 | 20.75 | 26.1 | 18-25      | 25                                                                                  |

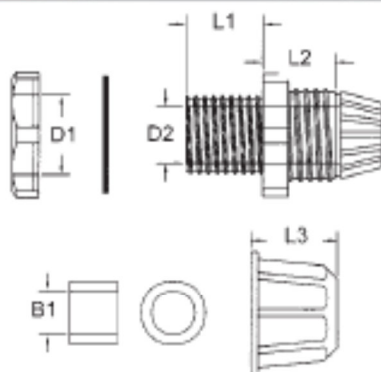

Material: Nylon 66 homologado  94 V-2.

Color standard:  **-GR.**

Otros colores:  **-AZ**,  **-BL**,  **-GC**,  **-IV**,

 **-NG.**