

PATCH PANELS AND ACCESSORIES FOR AUDIO & VIDEO



Application Audio Triaxial Connectors

No more jacks, but a modern and reliable connection system which guarantees total security.

LEMO offers audio and video patch panels fitted with Push-Pull connectors; this principle allows a reliable connection and avoids all risks of linkage interruption by pulling accidentally on the cable. This quality is even reinforced by the use of connectors with goldplated contacts according to standard MIL-G-45204C type I class 1.

Standard 19" elements with various configurations are offered on panels with 1, 2 or more units. Every connector row has a label holder for the identification of the signals. Our patch panels have a satin painting which is highly resistant to abrasion (standard colours black or grey) or a heat treated painting (standard colour beige, other colours available on request) or a natural anodized finishing, reflecting the quality of your applications.





PANEL AUDIO 1U 2x18 RJ-ERN.0S Arandela Roja Ref. PAU.1U2X180S-RJ

Description

Characteristics	Values
Audio Patch panel	19"
Height	1U
Connectors ERN.0S.650	2 x 18
Anodized aluminium panel	YES
Cable Support bars	YES
Red or Yellow colour washer	YES
Identificación card	YES

General characteristics 0S.650 connectors

Characteristics	Values
Endurance	> 5000 cycles
Humidity	up to 95% at 60°C
Standard temperature range	-55°C to +250°C
Vibration resistance	10 - 2000 Hz, 15g
Impact resistance	100g, 6ms
Corrosion	> 144h
Index protection	IP50 (connected)
Shielding efficiency	1GHz > 40dB

Available in other versions

- 1U rack, 2 x 18 and 2 x 26
- 2U rack, 2 x 24
- Various colours of washers

Accessories

- Analog and digital audio cables
- Patch cable
- Bridge-plug with two non-latching plugs



Triaxial connectors 0S and 1S Series


For audio mono applications, LEMO offers connectors of the triaxial type in the 0S and 1S series. These connectors can be fitted with a great number of accessories, such as insulating washers as well as sleeves for plug or socket, available in nine colours, blue, white, grey, yellow, brown, black, red, orange and green as are the shells of the bridge-plugs, thus enabling to create a code of the different signals already standardized in several radio and television centres.

Audio applications

All our patch panels are designed for LEMO sockets of the 0S (triax), 0B (3 contacts), 1B (3 or 6 contacts) or 1D (quadrax) Series on one or several rows.

Several linking diagrams or commutations are possible. Screened bifilar cables are used. For easy installation of the patch panels, the outputs on the rear panel are fitted with LEMO 0S (triax), 0B (3 contacts), 1B (3 or 6 contacts) or 5A (36 contacts) Series, Sub-D (37 contacts) or Elco (90 contacts) connectors.

Patch panel solution and cable assembly available

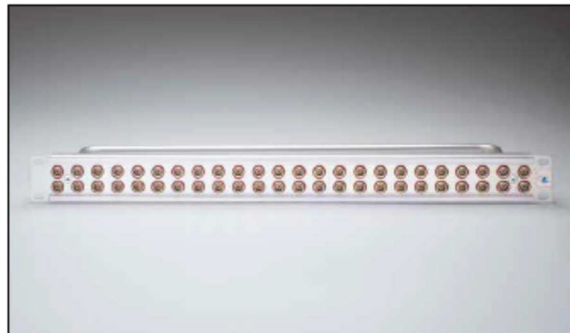

SUMMARY

Wires

Triax	1
-------	---



Image is for illustrative purpose only

Series	05
Termination type	Male solder
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active
Matching parts	FFA.05.650.CTLC42Z

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model	ERN*: Fixed receptacle, nut fixing, with grounding tab
Keying	Circular, male
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Weight	4.44 g

Performance

Configuration	05.650 : 1 Triax (50 Ohm)
Insulator	T: PTFE
Rated Current	6 Amps

Specifications

Contact Type: Triaxial 50 Ohm (Solder)
Contact Dia.: 0.9 mm (0.035" in)
Vtest: 1200 V (AC), 1700 V (DC)
Impedance: 50 Ohm
VSWR: $1.03 + 0.34 \cdot f / \text{GHz}$
Cable type: RGT 178, RGT 174

Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +250°C
Humidity (max): ≤95% [at 60 deg C / 140 F]
Vibration: 15 g [10 Hz - 2000 Hz]
Shock Resistance: 100 g [6 ms]
Climatical Category: 50/175/21
Shielding (min): 75 dB (10 MHz)
Shielding (min): 40 dB (1 GHz)
Salt Spray Corrosion: >1000 hr

DRAWINGS

