
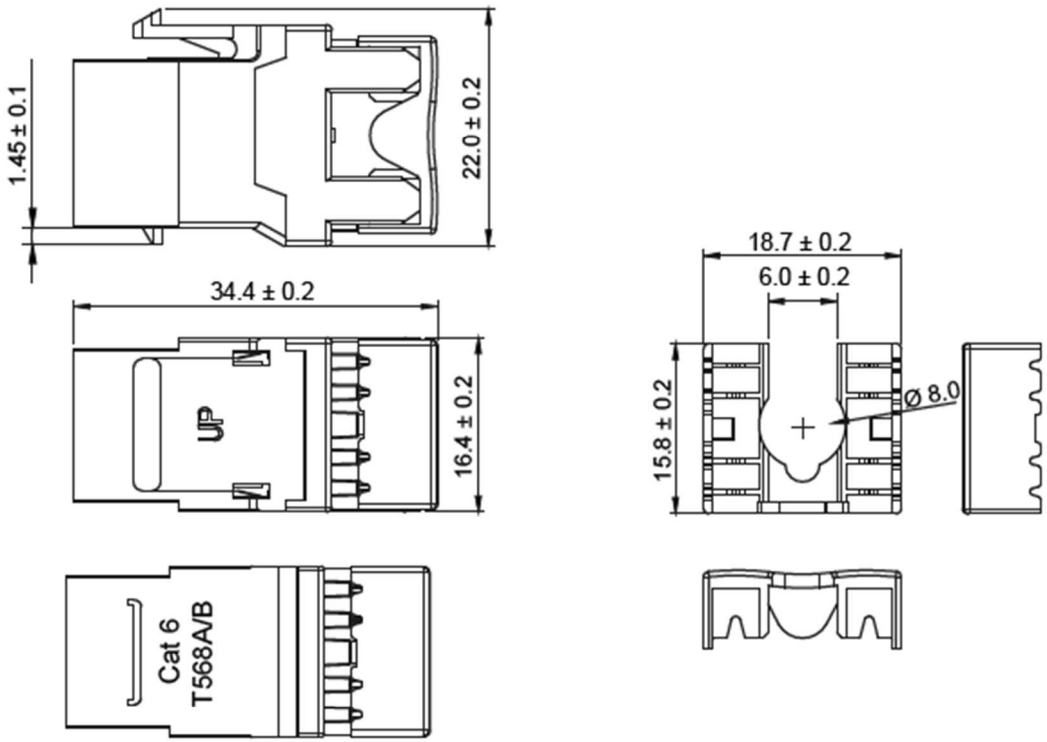


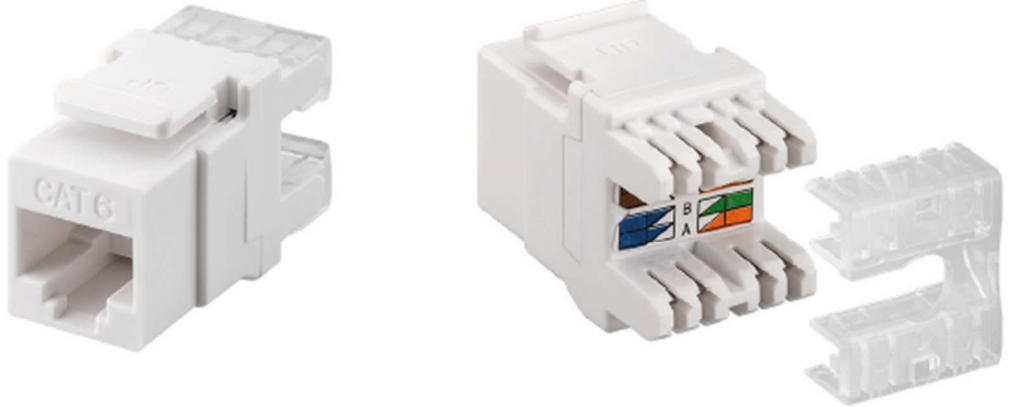

Keystone Modul RJ45 CAT 6, UTP, 250 MHz

- zum Einbau in Modular-Verteilerfelder bis 24 Port und Anschlussdosen
- RJ45-Anschlüsse sind TIA 568A/B farbkodiert
- geeignet fur Power over Ethernet (PoE+) gemäß IEEE 802.3 at

Anschlüsse:	RJ45-Buchse (8P8C) Klemmleiste für LSA Montag
Material Gehäuse:	PC
Material Kontakte:	Phosphor-Bronze
Schirmungsklasse:	UTP
Spezifikation:	CAT 6
Max. Bandbreite:	250 MHz
Kontaktwiderstand:	20 mΩ max.
Nennstrom:	1,5 A
Gleichstromwiderstand:	0,1 Ω max.
Isolationswiderstand:	500 MΩ min.
Spannungsfestigkeit:	1000 V ~ RMS 60 Hz, 1 min
Dauerhaftigkeit Steckverbindung:	RJ45: 750x min. Klemmleiste: 200x min.
AWG:	Volldraht AWG 23/1-26/1 (1 / 0.45-1 / 0.58 mm) Litzendraht AWG 24/7-26/7 (7 / 0,20-7 / 0,16 mm)
Außendurchmesser Kabel:	5,0 mm - 6,0 mm
Lagertemperatur:	-40 °C ~ +85 °C
Betriebstemperatur:	0 °C ~ +60 °C

Keystone module RJ45 CAT 6, UTP, 250 MHz

- can be mounted in Keystone panels up to 24 ports or wall outlets
- RJ45 connections are TIA 568A/B colour-coded
- suitable for PoE+ according to IEEE 802.3at

Connectors:	*RJ45 female (8P8C)* *Terminal strip for IDC connectors*
Material housing:	*PC*
Material contacts:	*Phosphor Bronze*
Shielding class:	*UTP*
Specification:	*CAT 6*
Max. bandwidth:	*250 MHz*
Contact resistance:	*20 mΩ max.*
Rated current:	*1.5 A*
DC resistance:	*0.1 Ω max.*
Insulation resistance:	*500 MΩ min*
Dielectric strength:	*1000 V ~ RMS 60 Hz, 1 min*
Durability plug connection:	*RJ45: 750x min.* *IDC: 200x min.*
AWG:	*solid wire AWG 23/1-26/1 (1 / 0.45-1 / 0.58 mm)* *stranded wire AWG 24/7 (7 / 0.20-7 / 0.16 mm)*
Outer diameter cable:	*5.0 mm - 6.0 mm*
Storage temperature:	*-40 °C ~ +85 °C*
Operating temperature:	*0 °C ~ +60 °C*