


BNC INSULATED BULKHEAD JACK TO JACK ADAPTOR 4.5GHz 10-503-B36



images for illustration purposes only

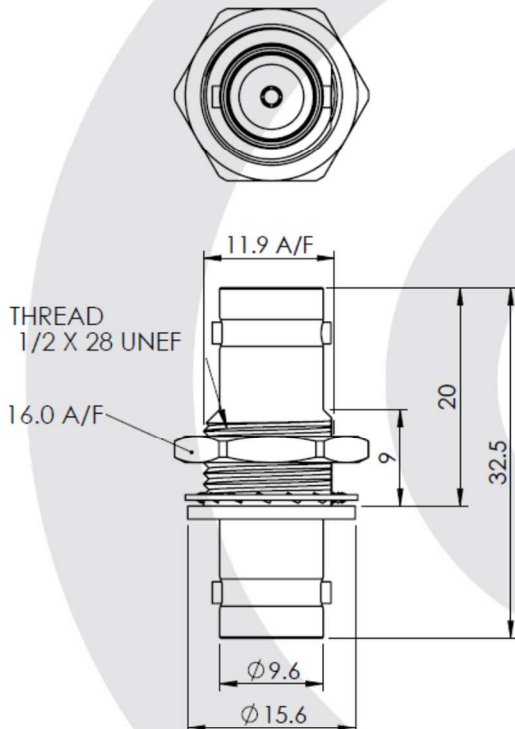

6	WASHER	BeCu	NICKEL
5	NUT	BRASS	NICKEL
4	INSULATION	ABS	N/A
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	PHOS. BRONZE	GOLD
1	BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
------	-------------	----------	---------

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
----	--------------	-------------------------------	--

REVISION :	A02	NAME	SIGNATURE	DATE
------------	-----	------	-----------	------

ISSUE :	2	DRAWN	IG	02/04/2013
---------	---	-------	----	------------

		CHK'D	GE	04/04/2013
--	--	-------	----	------------

		APPV'D		
--	--	--------	--	--

6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR	THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			
---	---	--	--	--

Suitable for Cables:

N/A

Environmental Specification

Operating Temp: -35 to +70 Deg C

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 to 6 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification


Contact Retention: 10 N min

Cable Retention: N/A

Mating cycles: 500

Weight: 14.34 g


Recommended Mounting Hole



5.0 MAX PANEL THICKNESS

Connector Interface

image for illustration purposes only



Performance

-29.4 dB @ 1.0 GHz

-42.8 dB @ 2.0 GHz

-27.9 dB @ 4.5 GHz

-20.5 dB @ 6.0 GHz

Return Loss Graph

