


Cableados y Conexiones S.L.

CABLE ALIMENTACIÓN SPLITTER DIVISOR de IEC C20 Macho a 2 x IEC C19 Hembra en 4,5 metros NEGRO (20 amperios)

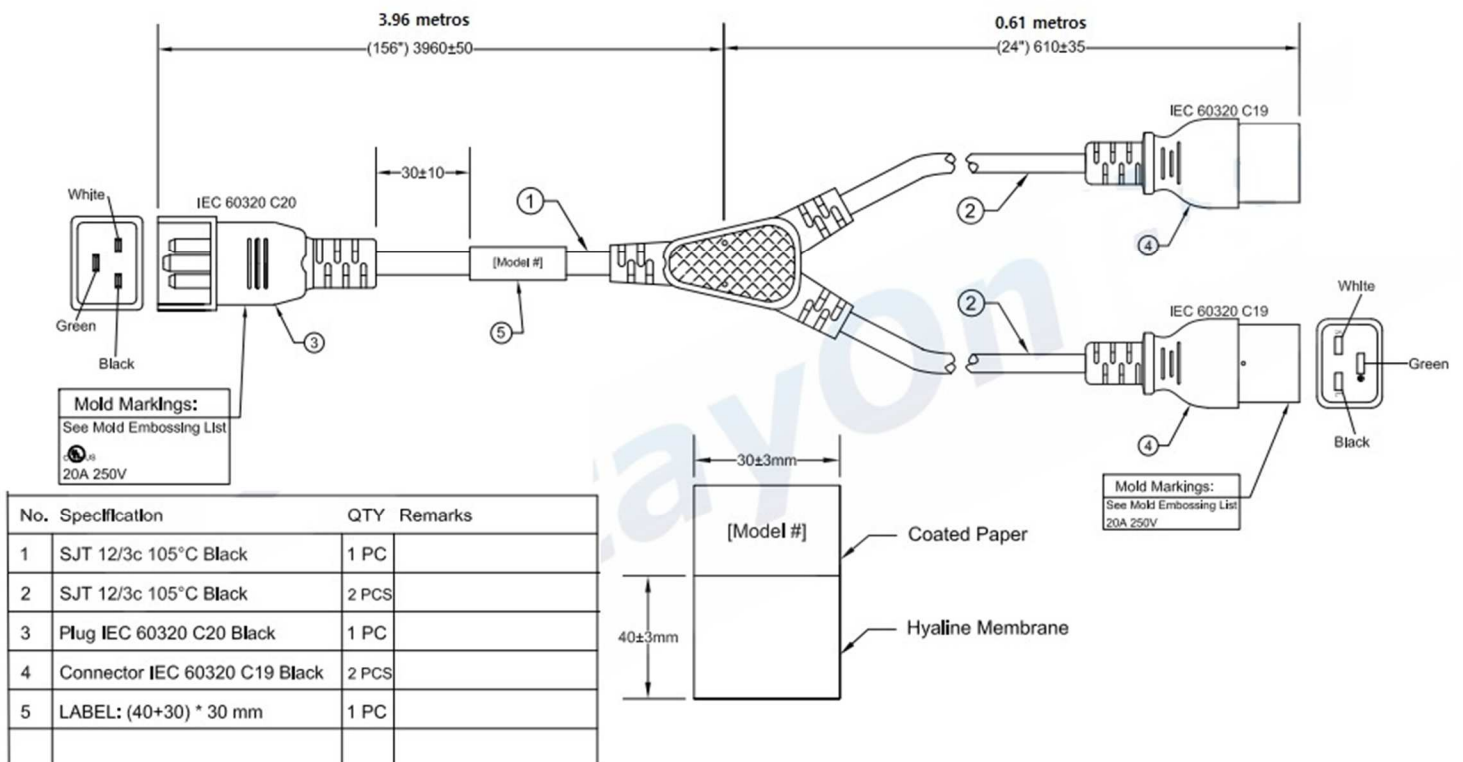

Cableados y Conexiones S.L.

Male Plug	IEC320 C20
Female Connector	IEC320 C19
Leg Count	2
Leg Length	24 Inch
Voltage	250 Volts
Amperage	20 Amps
Cable Length	4.5 Meter / 15 Feet
Tolerance	± 80 mm / ± 3.2 inches for molded cords ± 150 mm / ± 6 inches for mechanical cords
Conductor Size	12 Gauge AWG
Conductor Count	3 wires
Conductor Color Code	Black, White, Red, Green North American Color Code (NACC)
Outside Diameter	11.9-12.3mm
Cable Jacket	North America SJT
Jacket Material	PVC
Jacket Temperature Rating	105° C
Color	Black
Testing	Each cord is tested for dielectric voltage-withstand (Hi-Pot), polarization and continuity.
Certification(s)	US & Canada - cULus
Packaging	Coiled

This cord was previously branded under the PowerFig label.

Ideal for devices with multiple power supplies. Or allows 2 devices to share 1 outlet. Power cord commonly used between a high-end PDU and server in a data rack or cabinet. The female connector attaches to a IEC60320 C20 male inlet. Legs are 24 inches long.

Two sets of molds are used to manufacture this product. The differences are cosmetic while form, fit, and function are the same, so either model may be shipped to fulfill customer orders. The drawing Mold Embossing List notes the UL files that may appear on the mold. If you have a preference, please specify at the time of order.

