


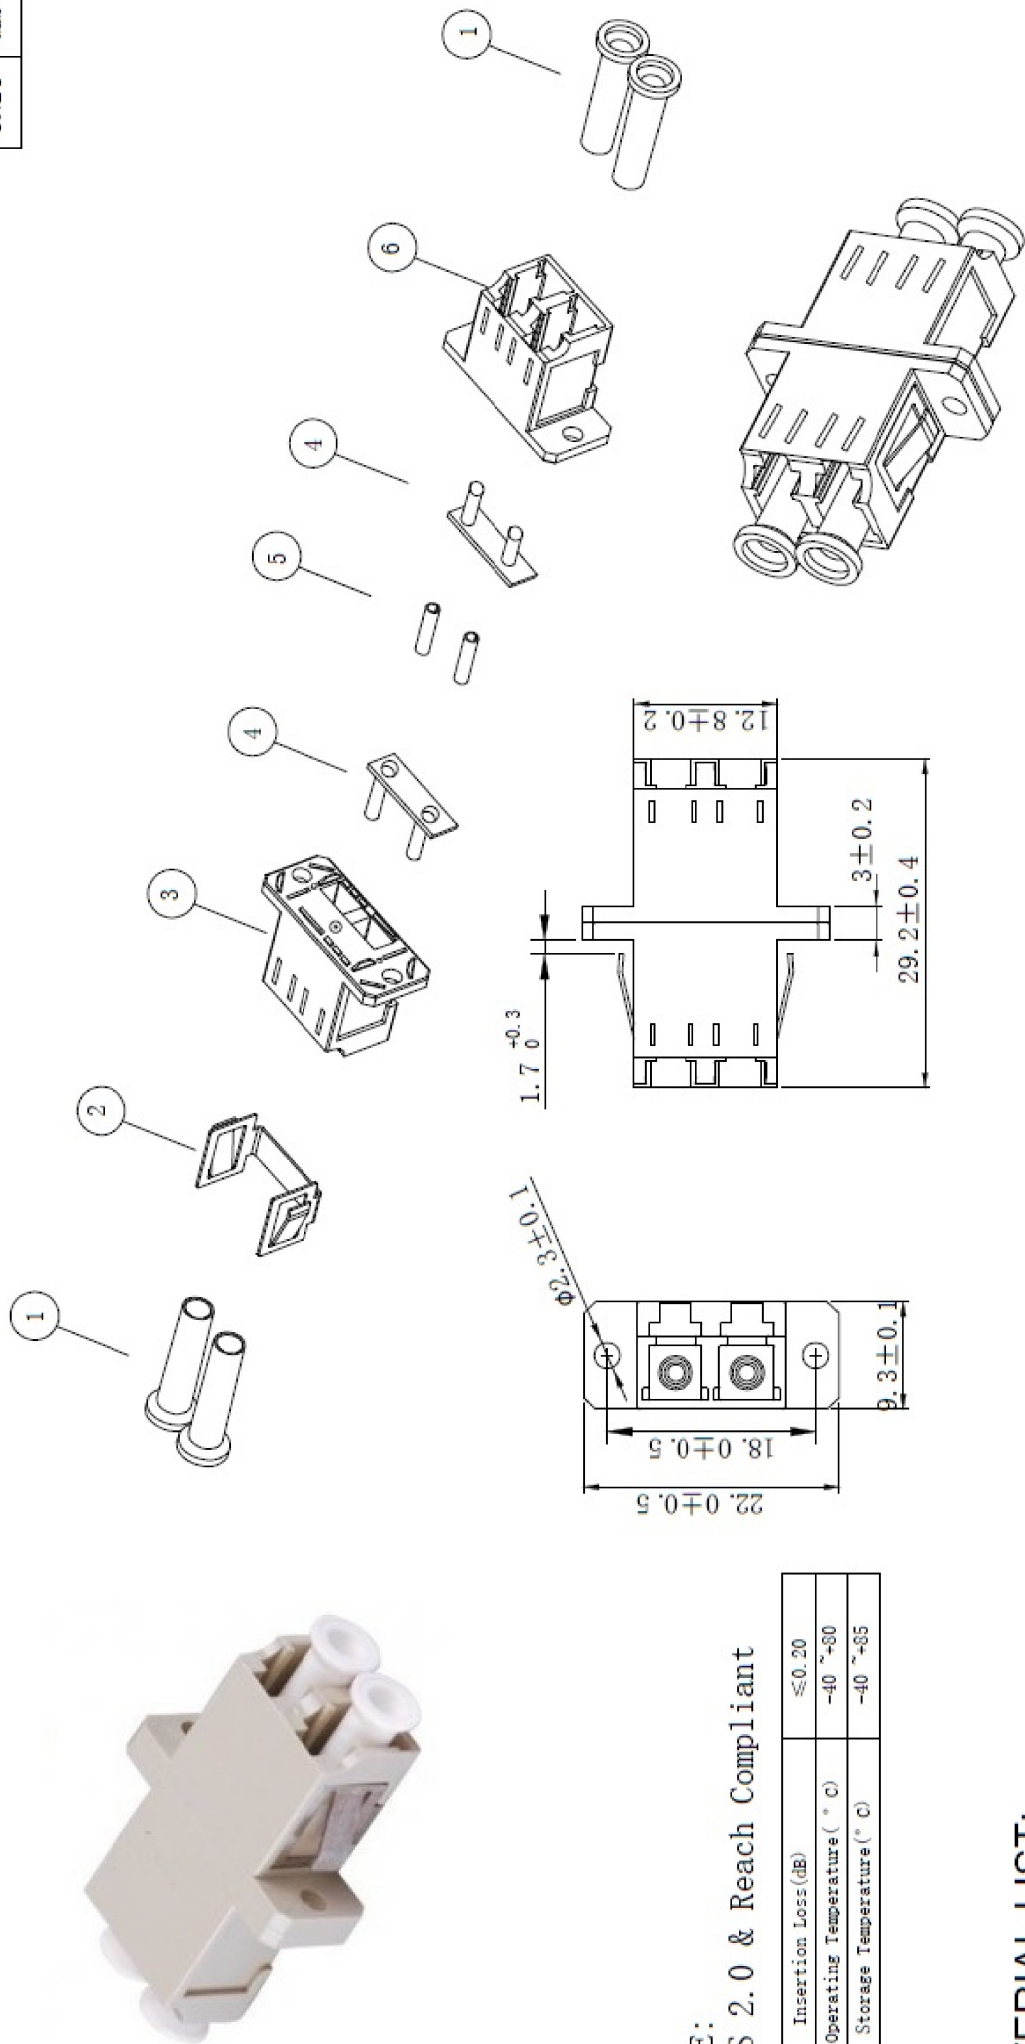

NOTE:
RoHS 2.0 & Reach Compliant

Insertion Loss(dB)	≤0.20
Operating Temperature(° C)	-40 ~+80
Storage Temperature(° C)	-40 ~+85

MATERIAL LIST:

⑥	LC Body (SC simplex footprint)	1pcs	
⑤	LC Sleeve ceramic	1pcs	
④	LC	2pcs	
③	LC (SC simplex footprint)	1pcs	
②	LC Metal Mount (SC simplex footprint)	1pcs	
①	LC White Dust Cap	4pcs	
No.	SPECIFICATION STANDARD	QT' Y	REMARK

	NEW	2022-02-07	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE REV.

21.99.0686	Value LC Duplex Plastic Body, w/Flange (OM4)
ITEM NO.	Product description