
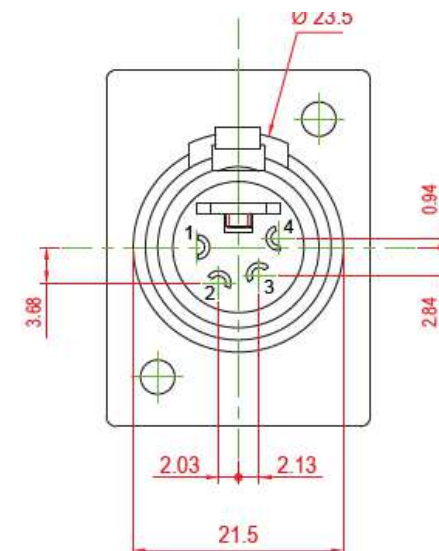
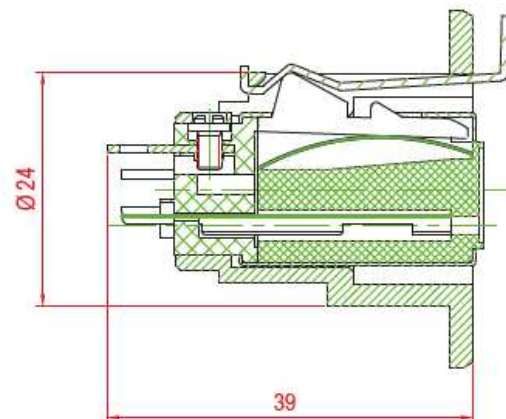


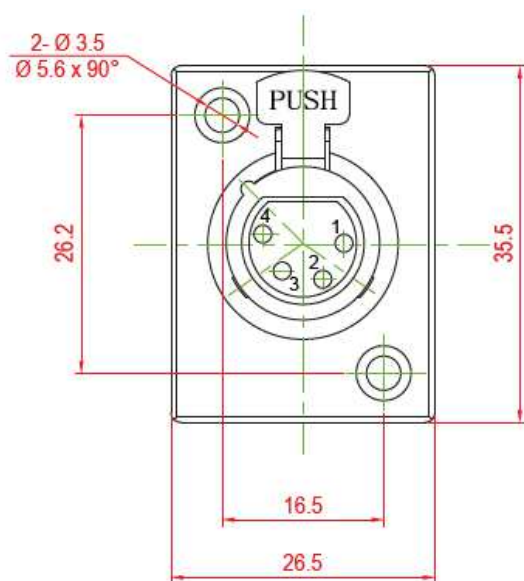

Mikrofon-Einbaubuchse, XLR-Buchse (4-Pin)

- zum Einbau in Audiogeräte und zur Verbindung von XLR-Audio- oder Mikrofonkabeln
- mit Verriegelung und vergoldeten Kontakten
- mit 4-poliger Belegung
- hochwertiges, robustes Metallgehäuse
- nur für den Hobby- und Bastlerbereich geeignet

Anschlüsse:	XLR-Buchse (4-Pin)
Material Gehäuse:	Zinklegierung, vernickelt
Material Kontakte:	Messing, vergoldet
Material Steckeseinsatz:	PBT 30%
Kontaktwiderstand:	≤ 5 mΩ
Nennstrom:	max. 10 A
Nennspannung:	1000 V ---
Isolationswiderstand:	>2000 MΩ
Dauerhaftigkeit Steckverbindung:	1000x
Einsteck-/Ausziehkraft:	≤ 25 N
Betriebstemperatur:	-30 °C ~ +70 °C

Microphone Chassis Femal Socket, XLR female (4-pin)

- for installation in audio equipment and connection of XLR audio or microphone cables
- with locking mechanism and gold plated contacts
- with 4-pin assignment
- high-quality, robust metal housing
- only suitable for hobbyist use

Connectors:	XLR female (4-pin)
Material housing:	Zinc alloy, nickel-plated
Material contacts:	Brass, gold-plated
Material plug insert:	PBT 30%
Contact resistance:	≤ 5 mΩ
Rated current:	max. 10 A
Rated voltage:	1000 V ---
Insulation resistance:	>2000 MΩ
Durability of plug connection:	1000x
Insertion/extraction force:	≤ 25 N
Operating temperature:	-30 °C ~ +70 °C

© 2025 Cableados y Conexiones S.L.

C/ Ciudad de Frías nº25 Nave 8 28021 Madrid ESPAÑA (Spain)

Tfno:91 428 00 36 - 91 471 54 32

info@caycon.es <http://www.caycon.es>