


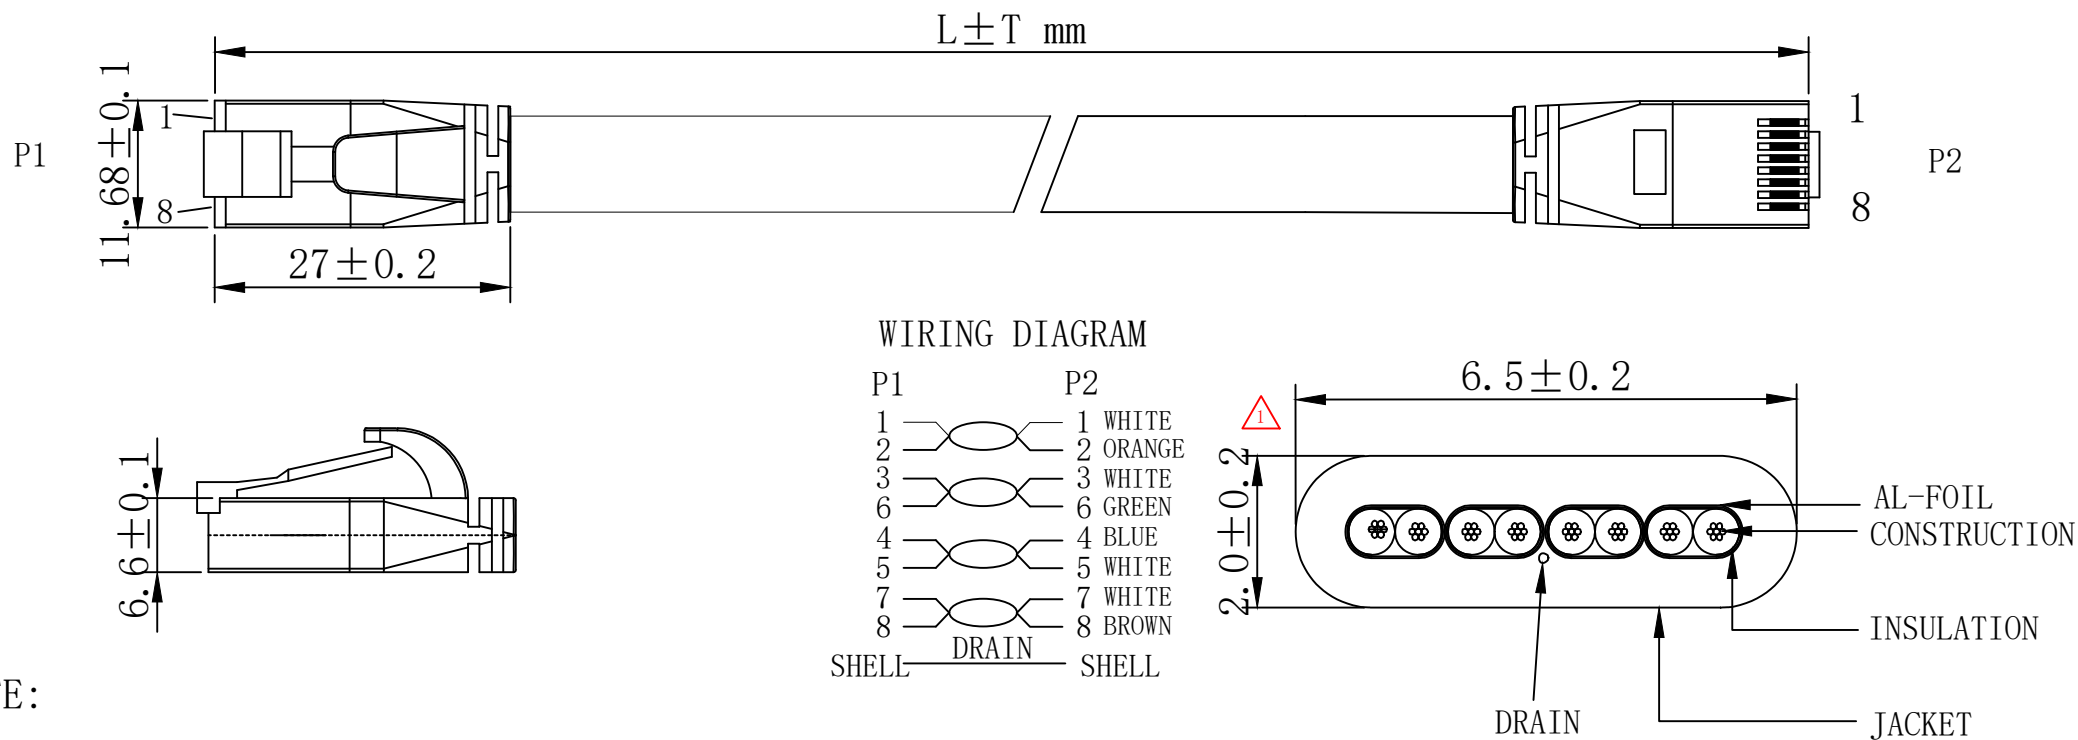

NOTE:

1. 100% OPEN SHORT, MISS WIRE TEST
2. Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
3. PRINT WORD: CAT6A U/FTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568.2-D
4. ROHS AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Black (Pantone 3C)	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated, Transparent Blue	2	
①	CABLE	(32AWG BC*1P+AL-FOIL)*4+E JACKET: PVC OD: 2.0 ± 0.2 * 6.5 ± 0.2 mm black (Pantone 3C)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH	WINDING SIZE
21. 99. 0830	500 ± 30 mm	90 ± 10 mm
21. 99. 0831	1000 ± 30 mm	130 ± 10 mm
21. 99. 0834	1500 ± 50 mm	140 ± 10 mm
21. 99. 0832	2000 ± 50 mm	140 ± 10 mm
21. 99. 0833	3000 ± 70 mm	150 ± 10 mm
21. 99. 0835	5000 ± 70 mm	150 ± 10 mm

Gao	Arvin	Add dimensioning for the cable	2026-01-14	A1	
		NEW	2019-07-03	A	
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.	

DESC.	VALUE Cat. 6A FTP Flat Patch cord, black