

KVM “Deslizarse y cambiar” de 4 PC’S (USB Tipo B) a 1 TECLADO (USB Tipo A) + 1 RATÓN (USB Tipo A) + 2 PERIFÉRICOS MAS (2xUSB Tipo A)

(todos los puertos con MiniJack de Audio estéreo)

Ref. KVM-0004AR2

Este modelo de conmutador KVM es compatible con la potente tecnología “Deslizarse y cambiar”, que permite a los operadores conmutar entre un máximo de 4 ordenadores **moviendo el ratón de una pantalla a otra, sin tener que pulsar botones ni teclas adicionales**. Comparta un solo teclado y ratón, dos dispositivos USB 2.0 y audio analógico entre todos los sistemas conectados.


Si así lo desea añada el kit de identificación del monitor para indicar el sistema activo y el monitor a través de los LED instalados en la pantalla.

Esta familia de KVM ahorra espacio en el escritorio y mejora el tiempo de respuesta del operador. Concebido para salas de trabajo y control, centros de comando o centros de llamadas 911/112.

Soluciones de salas de comando y control Post-producción y transmisión en salas de negociación financiera o control de tráfico aéreo y cajeros automáticos de seguridad pública. Ideal para una amplia gama de industrias, esta familia de KVM “Deslizarse y cambiar” no requieren la instalación de software o controladores adicionales en su PC, cuentan con un GUI de gestión para optimizar los flujos de trabajo para los operadores. Es por eso por lo que son ideales para una amplia gama de industrias y aplicaciones.



A TYPICAL INSTALLATION OF THE FREEDOM II IS SHOWN BELOW

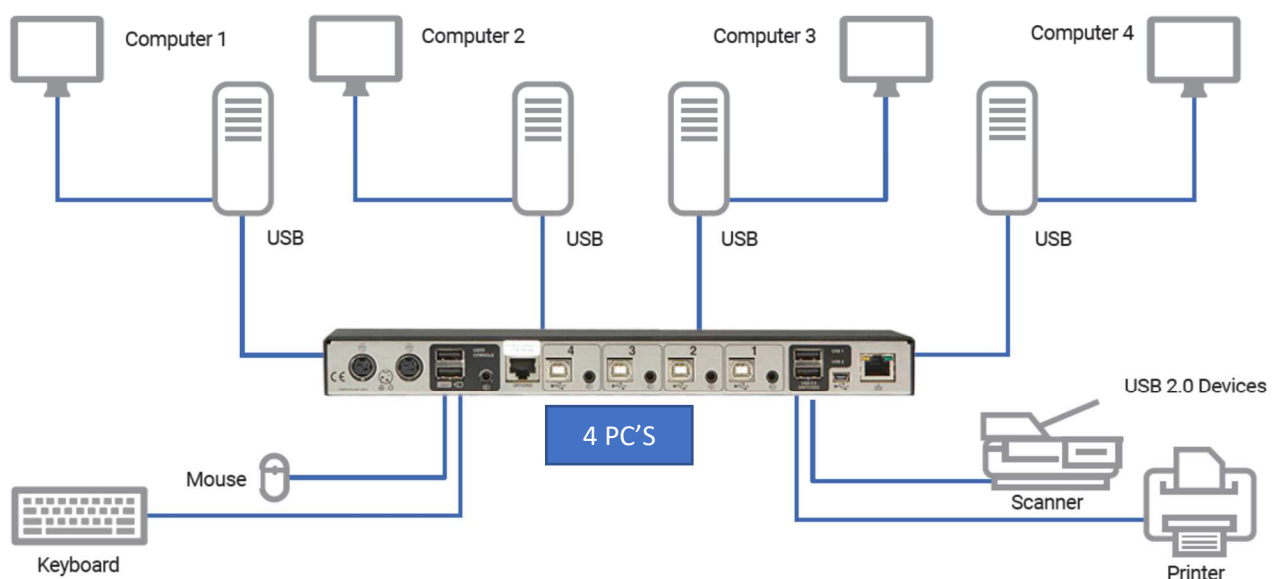

OVERVIEW

Control up to eight computer systems and their displays, and share peripherals among them.

FEATURES

- ♦ New glide and switch automatic switching technology.
- ♦ Control up to four (or up to eight) individual computer systems and their display screens using just one keyboard and mouse set. You can also share two further USB peripherals between the systems.
- ♦ Choose from five ways to switch: mouse buttons, keyboard hotkeys, front-panel buttons, remote control by another device or via glide and switch technology.
- ♦ Supports true emulation.
- ♦ Compact size.
- ♦ Channel indicator modules make it easy to see which display screen is currently selected.
- ♦ Auto combiner for all audio channels

WHAT'S INCLUDED

- ♦ Freedom II unit
- ♦ Power adapter and power cord
- ♦ Flash upgrade adapter
- ♦ (4) self-adhesive feet

ADDITIONAL ITEMS YOU MAY NEED

- ♦ Freedom LED Monitor kit with four stick-on indicators and cables (part number KVM-004ALED)
- ♦ USB Type-A to Type-B cable less than 15-ft. (5-m) long
- ♦ 3.5-mm audio cable

SPECIFICATIONS

Approvals	CE, FCC
Hardware Compatibility	All computers with USB interfaces
Software Compatibility	Operates with all known software and operating systems including Windows®, Linux®, Unix®, BSD, all Sun® OS, all Mac® OS, NetWare®, etc.
Connectors	Keyboard/mouse: USB Type A female; Switched USB: USB 2.0 Type A female; Audio: 3.5-mm stereo jack; Other: Modular 10p10c for flash upgrade and channel switching commands
Operating Temperature	32 to 104° F (0 to 40° C)
Power	Dual DC connectors (one power adapter included); Input: 100 to 240 VAC, 50 to 60 Hz; Output: 12 VDC, 1.5 A; Consumption: 18 W
Dimensions	1.22"H x 11.4"W x 5.04"D (3.1 x 29 x 12.8 cm);

USER INTERFACE

STATUS

CONFIGURATION

UPGRADE

Zero Touch Switch Manager

SWITCH ID : 00:0F:58:65:43:21

SIGNED IN AS : admin

Channel control

K/M channel ▼

Speaker channel ▼

USB1 channel ▼

USB2 channel ▼

Switch status

Power input 1 : Inactive

Power input 2 : Active

Temperature : 30 °C

MAC address : 00:0F:58:65:43:21

GLIDE AND SWITCH AUTOMATIC SWITCHING TECHNOLOGY ILLUSTRATED

- Automatically switch between channels by monitoring the mouse pointer position.
- The keyboard/mouse, the speakers and two individual USB channels can be collectively or separately switched through to each PC system using a variety of manual and/or automatic switching methods.

