

# Panels and Patchbays

## 75Ω Video Patchbays

### 75Ω Video Patchbays

3G-ready HD-SDI video patchbays featuring Canare's uniquely-developed rotary switches.

#### ■ Patchbays

| Model    | Panel Size | Loaded Video Jacks |
|----------|------------|--------------------|
| 20DV     | 1 RU       | 20 x DVJB-W        |
| 20DVS    | 1 RU       | 20 x DVJB-S        |
| 20DV-2U  | 2 RU       | 20 x DVJB-W        |
| 20DVS-2U | 2 RU       | 20 x DVJB-S        |
| 24DV     | 1 RU       | 24 x DVJB-W        |
| 24DVS    | 1 RU       | 24 x DVJB-S        |
| 24DV-2U  | 2 RU       | 24 x DVJB-W        |
| 24DVS-2U | 2 RU       | 24 x DVJB-S        |
| 26DV     | 1 RU       | 26 x DVJB-W        |
| 26DVS    | 1 RU       | 26 x DVJB-S        |
| 26DV-2U  | 2 RU       | 26 x DVJB-W        |
| 26DVS-2U | 2 RU       | 26 x DVJB-S        |

Color: black \*9 custom colors available. See page 79.

#### Key Features and Benefits

- Rotary Switch Technology with dual-contact construction
- Can be recessed 25 mm.
- Wide designation strip (2 RU type).
- Lightweight aluminum alloy video jacks.

#### ■ Dual Video Jacks

| Model  | Description      | Rear Jacks |
|--------|------------------|------------|
| DVJB-W | Normal Through   | BNC        |
| DVJB-S | Straight Through | BNC        |


#### ■ WECO Plugs

| Model     | Suitable Cable                             | Boot | Die Set              |
|-----------|--------------------------------------------|------|----------------------|
| VWP-C25HW | L-2.5CHWS                                  | CB04 | TCD-D253F            |
| VWP-C4A   | LV-61S, RG-59B/U, Belden 8241, 8279, 88241 | CB04 | TCD-451CA<br>TCD-4CA |


\*Standard package: 20 pcs

#### ■ Accessories

| Model         | Description                                  |
|---------------|----------------------------------------------|
| VPC**-WC      | WECO patch cords (see page 91)               |
| BCJ-VWP       | BNC (female) to WECO plug conversion adapter |
| BET-12        | BNC extraction tool (see page 47)            |
| VJ-DC         | Duct cap for DVJB (black, 40 pcs)            |
| VJ2-V**-U-*** | Unloaded panels (see page 80)                |

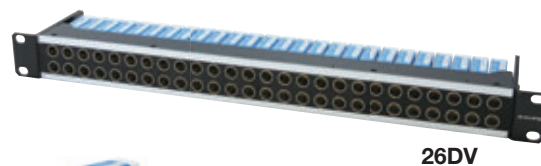



26DV

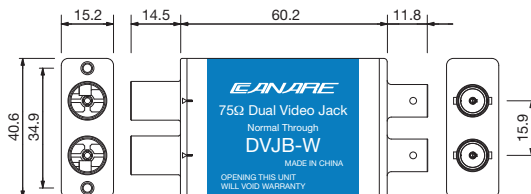


VWP-C4A

#### Return Loss & Isolation

| Model                       | MCVJ-W                      | MCVJ-S                      |
|-----------------------------|-----------------------------|-----------------------------|
| RL                          |                             |                             |
| DIN-DIN:<br>Normal Through  | 20 dB or greater<br>@ 3 GHz | —                           |
| DIN-Video:<br>Patch Through | 20 dB or greater<br>@ 3 GHz | 20 dB or greater<br>@ 3 GHz |
| DIN-Self Termination        | 10 dB or greater<br>@ 3 GHz | 20 dB or greater<br>@ 3 GHz |
| Isolation                   | 45 dB or greater<br>@ 3 GHz | 45 dB or greater<br>@ 3 GHz |



Return loss for DVJB-W



Isolation